





记号	日期	修改记录




SECTION A-A







SECTION B-B

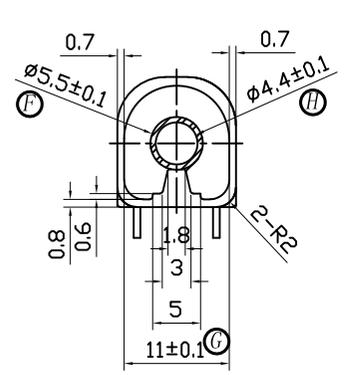


SECTION C-C



SECTION D-D

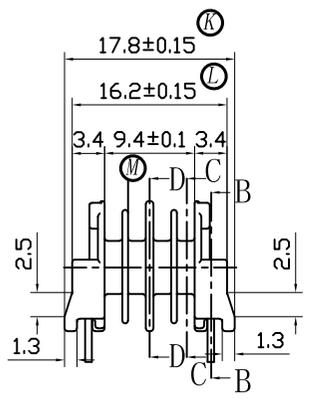




SECTION E-E




NOTE:

- PART NO. :
- MATERIAL: PM-9820 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: UR-12
- MATERIAL OF PIN : 3/4H CP WIRE, 0.70 ± 0.05
- TOLERANCES: (尺寸公差)

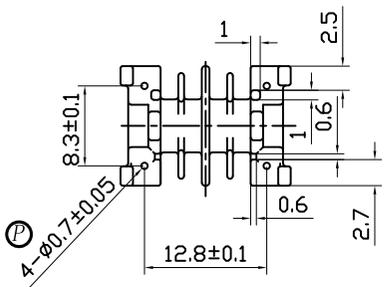

SECTION F-F



	X.X	X.XX
0-10	±0.2	±0.08
10-20	±0.3	±0.15
ABOVE20	±0.5	±0.25

ANGULAR DIMS ± 1/2 DEG



NAME	UR-12(4P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1'
DRAWING NO.	HX 1204	PIN MATERIAL	WIRE CP	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL:0769-86388188 FAX:0769-86388111 E-Mail:hxbobbin@vip.163.com			TOLERANCE OF PIN DIA ±0.05				PIN TENSION LOAD 1.5 kg MIN
TOLERANCE:			UL REC. :94V0		DATE: APR 24 2010		
DRAWN & DRAFTED BY		LIN HUA JING	CHECKED & APPROVED BY		LIN GUO PING	DATE: APR 24 2010	