



记号	日期	修改记录
1	2011/08/06	1. C1尺寸由1.60改为1.35, H3尺寸由8.10改为8.35 (mm)



NOTE:

- PART NO. :
- MATERIAL: PM-9820 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: EI16
- MATERIAL OF PIN : 3/4H CP WIRE, $\square 0.60 \pm 0.05$
- DIMENSION MARK : \square MAIN DIM. , \circ SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM. .




标示的 \square 为重要尺寸, 标示的 \circ 为次要尺寸.

7. TOLERANCES: (尺寸公差)

	X.X	X.XX
0-10	± 0.2	± 0.08
10-20	± 0.3	± 0.15
ABOVE20	± 0.5	± 0.25

ANGULAR DIMS $\pm 1/2$ DEG

RoHS
HF

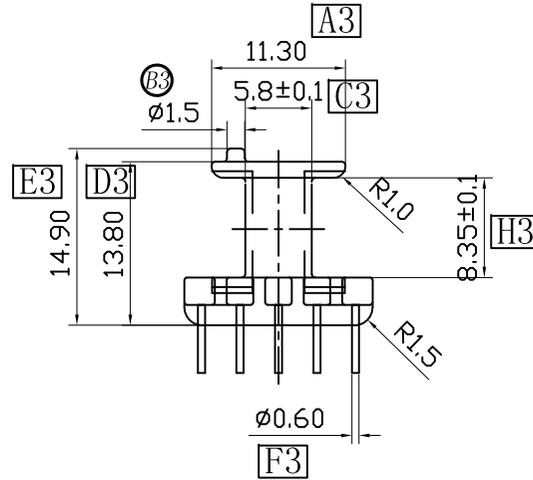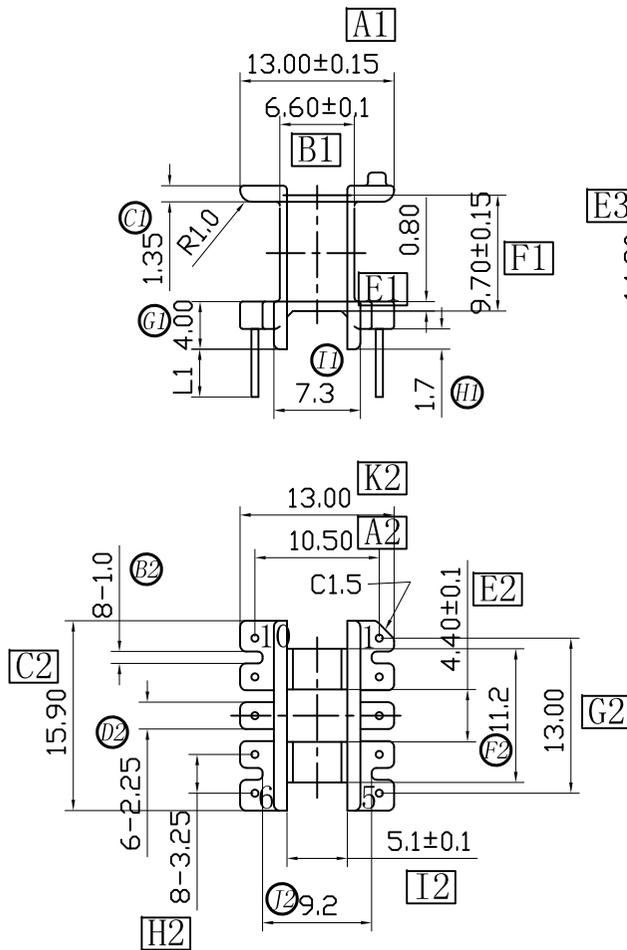

NAME	EI-16 (10P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	$\pm 1'$
DRAWING NO.	HX 1623	PIN MATERIAL	WIRE CP	UNIT	m/m	REV.	01
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com				TOLERANCE OF PIN DIA ± 0.05		UL REC.: 94V0	
				PIN TENSION LOAD 1.5 kg MIN		TOLERANCE:	
DRAWN & DRAFTED BY		LIN HUA JING	CHECKED & APPROVED BY	LIN GUO PING	DATE:	AUG 06 2011	