
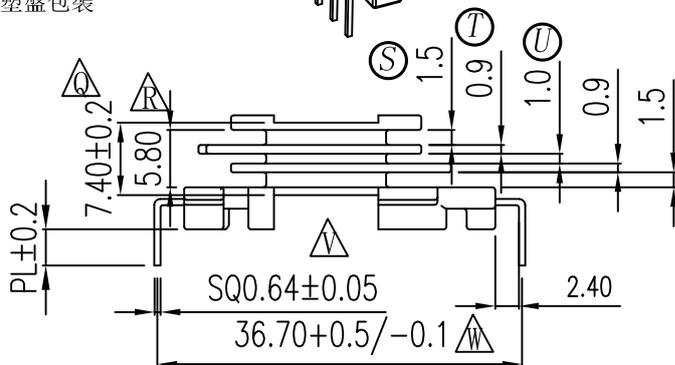
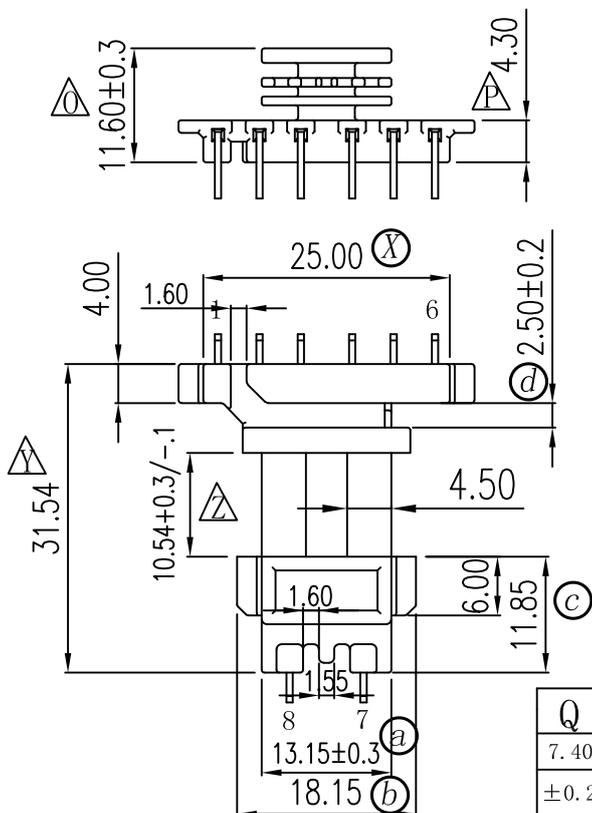


備註說明:

1. 強度要求: 1.80kg MIN, 中間葉片是1.0kg MIN
2. PIN拉力: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/60S
4. 焊錫溫度: 450° ±10° 3SEC
5. PIN來回90° 折彎一次無折斷, 龜裂
6. 模具狀況: 量產模
7. 包裝方式用吸塑盤包裝



備註說明:

1. PART NO. : HX1928 量產模
2. MATERIAL: PM-9630 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: EE-1911A
5. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.64±0.05
6. DIMENSION MARK : Δ MAIN DIM., \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM.
7. HX1928與HX1927共用半成品, 插PIN彎腳不一樣。

Q	R	S	T	U	V	W	X	Y	Z	a	b	c	d
7.40	5.80	1.50	0.90	1.00	0.64	36.70	25.00	31.54	10.54	13.15	18.15	11.85	2.50
±0.2	±0.2	±0.1	±0.1	±0.1	±0.05	$^{+0.5}_{-0.1}$	±0.3	±0.3	$^{+0.3}_{-0.1}$	±0.3	±0.3	±0.2	±0.2

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P
13.15	7.50	19.30	10.54	4.20	5.20	30.00	5.74	4.14	12.14	10.54	13.15	21.80	22.30	11.60	4.30
±0.3	±0.2	±0.3	$^{+0.3}_{-0.1}$	±0.2	±0.2	±0.3	±0.2	±0.1	±0.2	$^{+0.3}_{-0.1}$	±0.2	±0.3	±0.3	±0.3	±0.2

客户确认
签回



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-1911A (8P)	MATERIAL	PM-9630	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-1928	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	A
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		DRAWN & DRAFTED BY		CHECKED & APPROVED BY	
		LIN HUA JING					