


支點強度1.50kg MIN

凸點強度1.50kg MIN

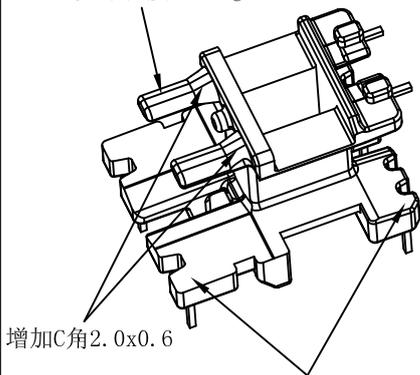

此平面強度1.80kg MIN

備註說明:

1. 材質: PM-9823
 2. 強度要求: 1.80kg MIN, 支(凸)點強度1.50kg MIN
 3. 耐壓要求: 4KV/1.5mA/1分鐘
 4. 焊錫溫度: 450° ±10° 3SEC
 5. 拉力: 焊後拉力 1.53kg MIN
 6. 模具狀況: 量產模
 7. 模針要求: 圓孔插方PIN
- 標示的 Δ 為重要尺寸, 標示的 \textcircled{X} 為次要尺寸。

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
24.50	8.00	19.00	5.10	21.70	14.80	7.00	14.00	5.10	2.95	17.90	5.50	2.50	10.20	10.90		21.50	1.10	0.60	9.10	6.70
±0.3	±0.1	±0.3	+0.1/-0.08	±0.3	±0.2	±0.2	±0.15	±0.2	±0.1	±0.3	±0.2	±0.1	±0.2	±0.1		±0.2	±0.1	±0.05	±0.2	±0.2

V	W	X	Y	Z	a
4.00	8.00	11.00	5.30	4.50	3.00
±0.1	±0.2	±0.2	±0.2	±0.2	±0.1

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-1916(12P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-1930	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. : 94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: DEC 03 2015	