



備註說明:

1. PART NO. : HX-2313A 量產模
2. MATERIAL: PM-9630 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: CR23/16.6
5. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.60±0.05
6. 強度要求: 2.00kg MIN
7. 耐壓要求: 4KV/1.5mA/1分鐘
8. 焊錫溫度: 450° ±10° 3SEC
9. 拉力: 焊後拉力 1.5kg MIN
10. HX-2313A與HX-2313B匹配OK

PIN#1根部須插穿
規格: PIN露出凹槽0.90+0/-0.3

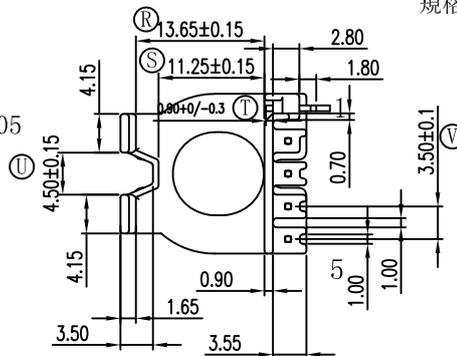

R	S	T	U	V
13.65	11.25	0.90	4.50	3.50
±0.15	±0.15	+0/-0.3	±0.15	±0.1

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
19.75	12.80	17.10	18.40	10.80	9.70	3.80	0.90	2.70		10.00	8.90	16.70	4.60	0.60	9.10	10.8
±0.3	±0.2	±0.3	±0.3	±0.15	+0.2/-0.1	±0.1	±0.1	±0.2		±0.15	+0.2/-0.1	±0.3	±0.2	±0.05	+0.2/-0.15	+0.1/-0.2

客户确认
签回



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	CR-23*16.6(5+1P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-2313A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY		CHECKED & APPROVED BY	
		LIN HUA JING					