









B-B

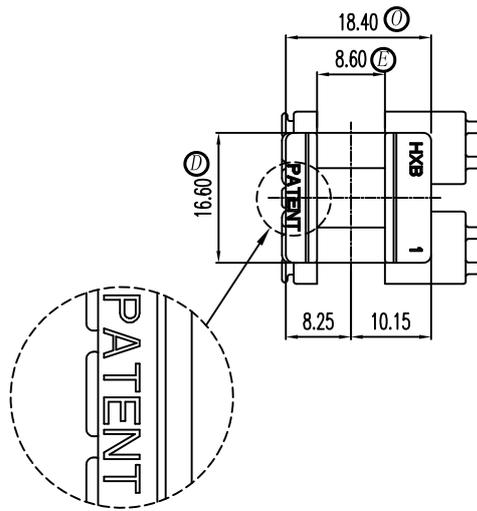

1:3



A-A

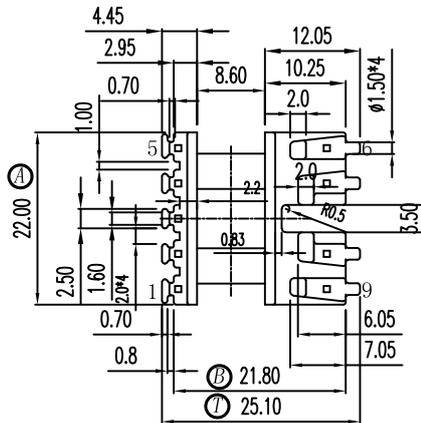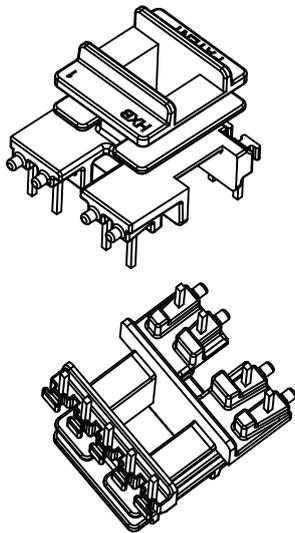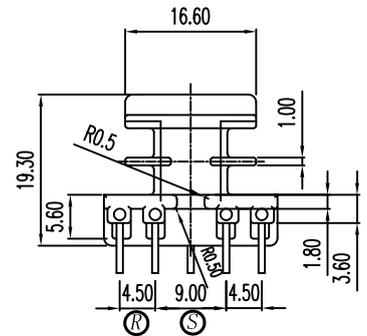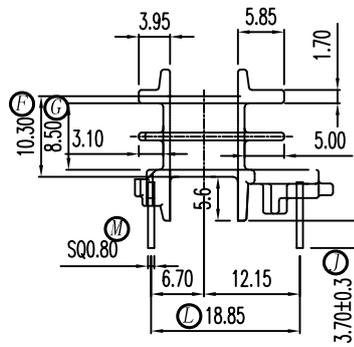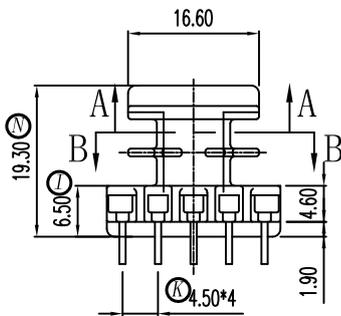

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. PIN7, 8BASE凸點離PIN針距離由0.86改為1.20(mm)	2012/10/08	03	1. 按客戶要求紅色尺寸變更	2013/07/25
02	1. 4個PIN邊T型過線槽改為直過線槽底部周邊R角0.30改為0.50,	2013/02/25	04		

NAME	EE-2318V (9P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 2302	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	03
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.0 kg MIN TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. :94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: OCT 08 2012	