
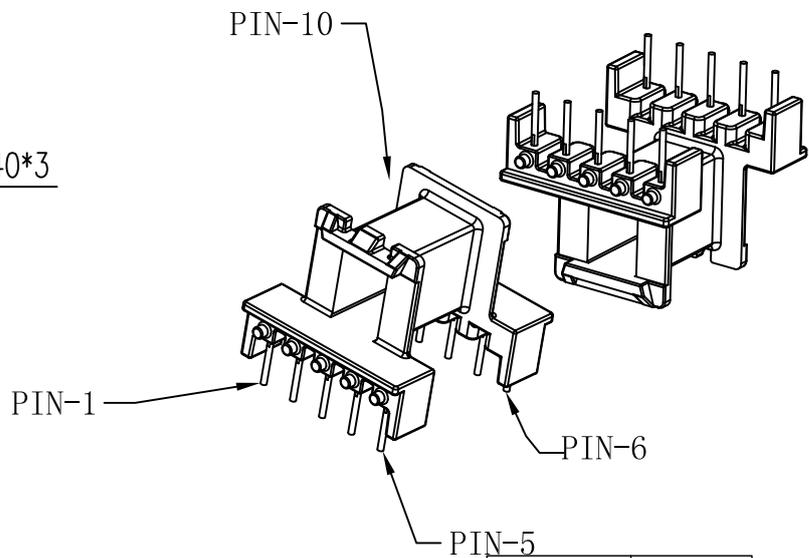
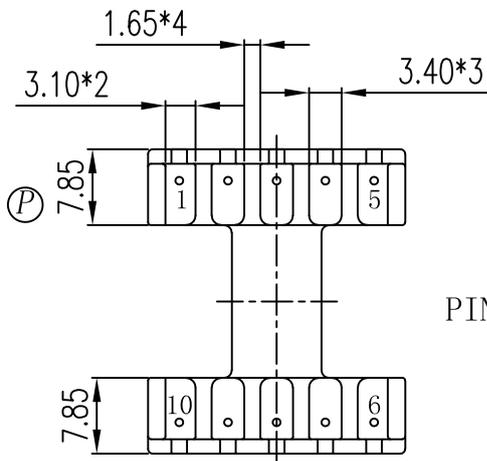
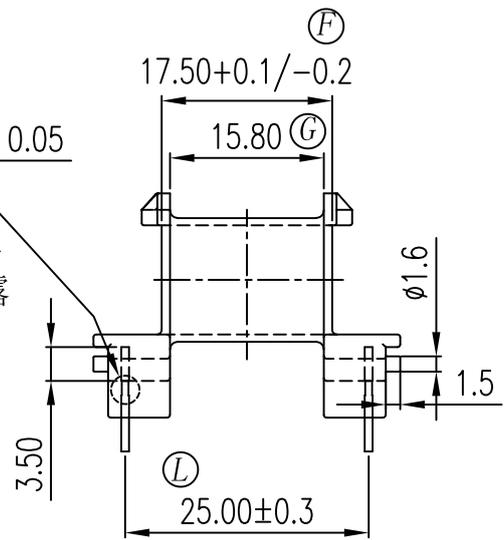



SECTION A-A

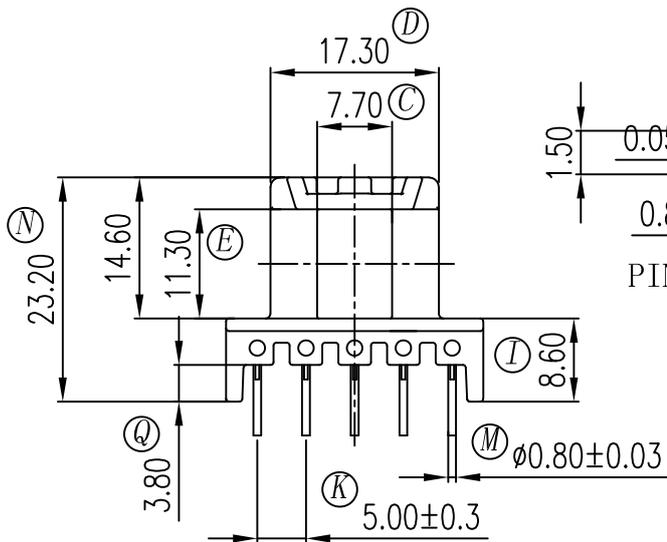

客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|---|------------|-----|-----------------|------|
| 01 | 1. BASE側邊突點寬度由1.00改為1.60, 高度由0.90改為1.50, 加大增加強度 | 2012/02/15 | 03 | | |
| 02 | 1. PIN腳增加咬花外露. | 2013/08/29 | 04 | | |

| NAME | EE-2525 (10P) | MATERIAL | PF-2736 | SCALE | 1:1 | ANGLE | ±1° |
|--|---------------|---|---------|-----------------------|-----|-------------------|-----|
| DRAWING NO. | HX 2528 | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 02 |
| 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com | | TOLERANCE OF PIN DIA ±0.05 | | UL REC. :94V0 | | | |
| | | PIN TENSION LOAD 1.0 kg MIN | | | | | |
| | | TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3 | | | | | |
| DRAWN & DRAFTED BY | | LIN HUA JING | | CHECKED & APPROVED BY | | DATE: FEB 15 2012 | |