

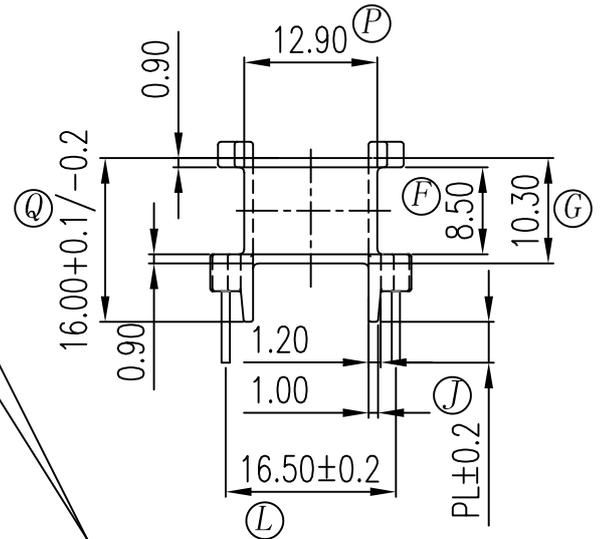


備註說明:

1. 材質: PM-9820
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 量產模

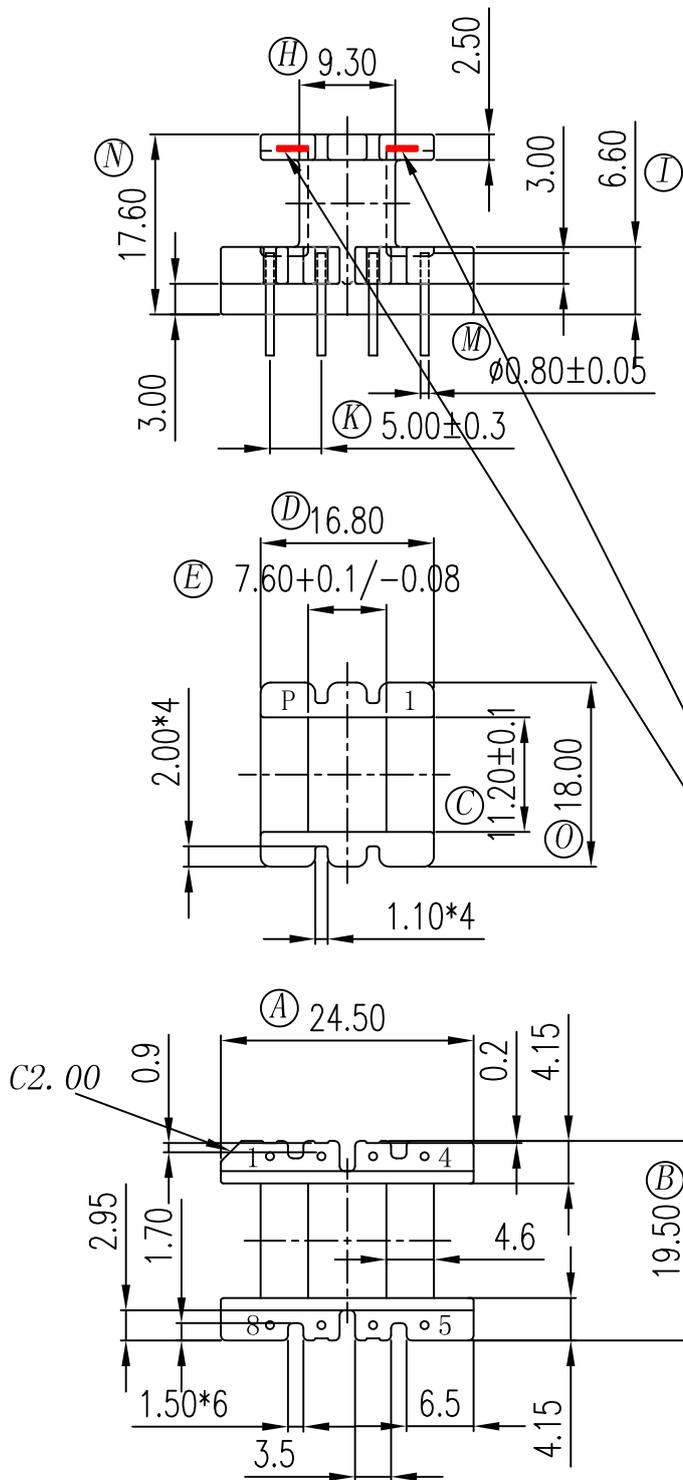

進膠口位置
寬度3.00

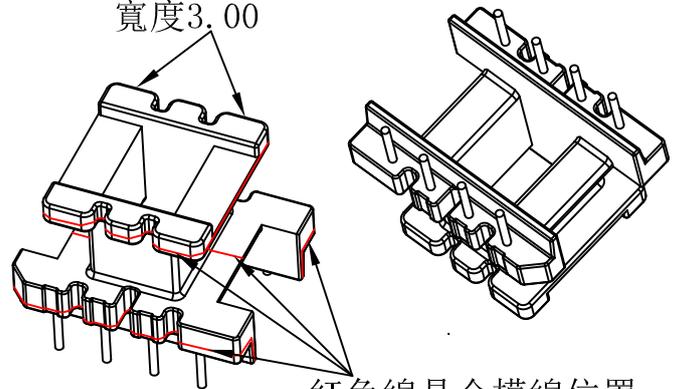

紅色線是合模線位置

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
24.50	19.50	11.20	16.80	7.60	8.50	10.30	9.30	6.60	PL	5.00	16.50	0.80	17.60	18.00	12.90	16.00	
±0.3	±0.3	±0.1	±0.3	+0.1/-0.08	±0.2	±0.2	±0.2	±0.2	±0.2	±0.3	±0.2	±0.05	±0.3	±0.3	±0.2	+0.1/-0.2	

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. PIN1 BASE增加一個小線槽	2014/10/15	03		
02			04		

NAME	EE-2518W (8P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 2543	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD 1.5 kg MIN		UL REC. :94V0			
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: JUN 16 2014	