

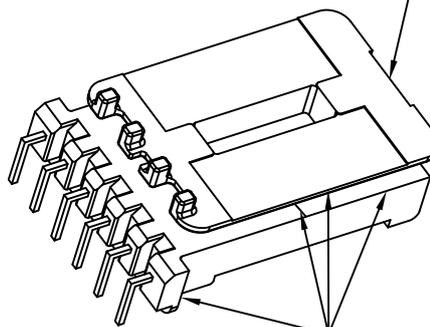
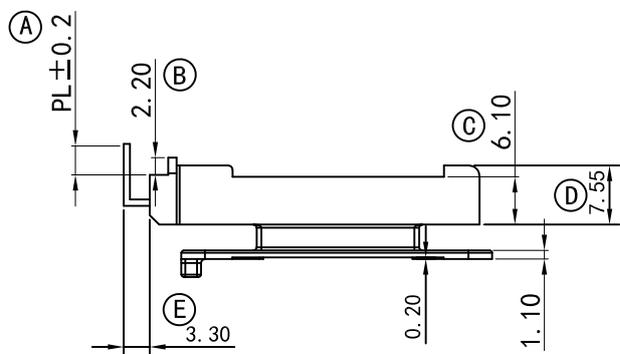
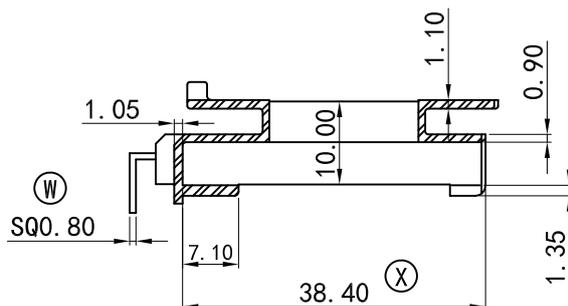
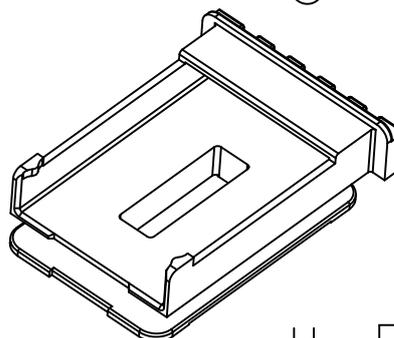
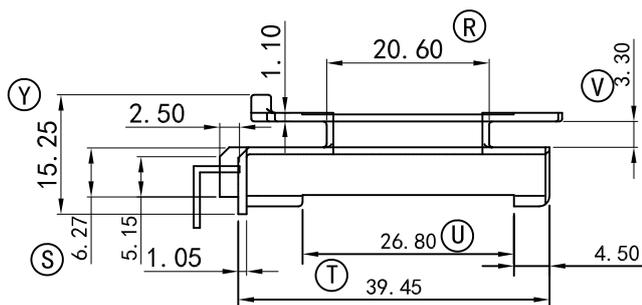


進膠口位置

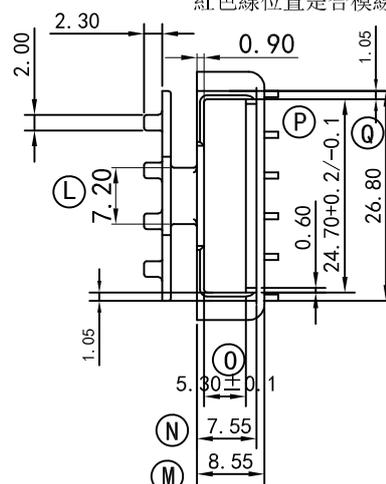


紅色線位置是合模線

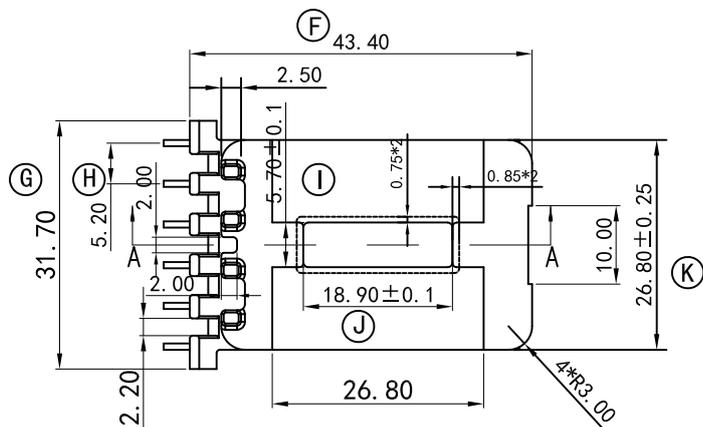

SECTION A-A

備註說明:

1. 材質: PM-9820
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.53kg MIN
6. 模具狀況: 正式模

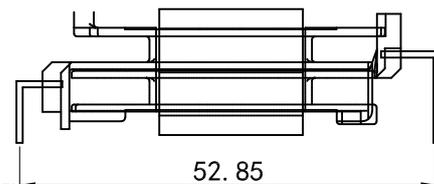

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	裝配槽內側增加加強筋	2020/06/11	03		
02	取消裝配槽內側面加強筋	2020/06/28	04		

NAME	EE-3217V (6P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-3243A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	02
		TOLERANCE OF PIN DIA ±0.05					
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.		PIN TENSION LOAD 1.0 kg MIN		UL REC. :94V0			
TEL:0769-86388088 86388188 86388288 FAX:0769-86388111		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	LIN GUO PING	DATE:	NOV 23 2018