


此部分C角是1.70*1.70

備註說明:

1. 材質: PM-9820
2. 強度要求: 3.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 拉力: 焊後拉力 1.50kg MIN
6. 模具狀況: 正式模

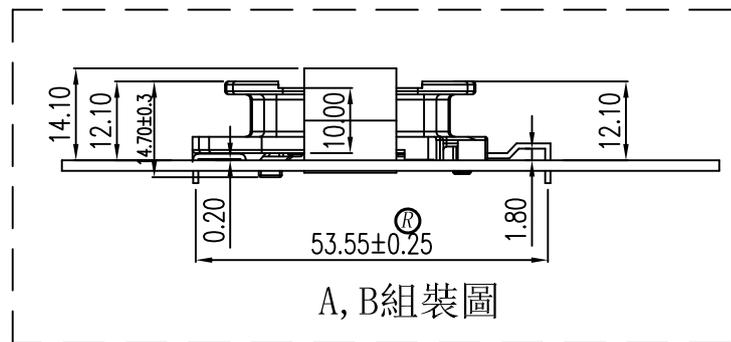

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U
38.10±0.3	21.90±0.2	5.50±0.2	31.70+0.1/-0.3	13.50±0.2	5.00±0.2	2.50±0.1	6.50±0.2	10.00±0.2	30.30±0.3	26.71±0.3	22.80±0.3	17.80±0.3	4.50±0.2	32.39±0.3	44.85±0.3	31.70+0.1/-0.3	53.55±0.3	37.49±0.3	0.80±0.05	PL±0.2

客户确认
签回



REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	D尺寸由31.90改為31.70+0.1/-0.3, Q尺寸由32.10改為31.70+0.1/-0.3 鐵芯孔邊部分C角1.20*1.20改為1.70*1.70	2017/01/23	03		
02			04		

NAME	EE-3716H(6P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 3705A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com	TOLERANCE OF PIN DIA ±0.05						
	PIN TENSION LOAD 1.5 kg MIN				UL REC. :94V0		
TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY LIN HUA JING		CHECKED & APPROVED BY		DATE: OCT 30 2016	