


備註說明:

1. 材質: PM-9820
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 2.00kg MIN
6. 模具狀況: 正式模

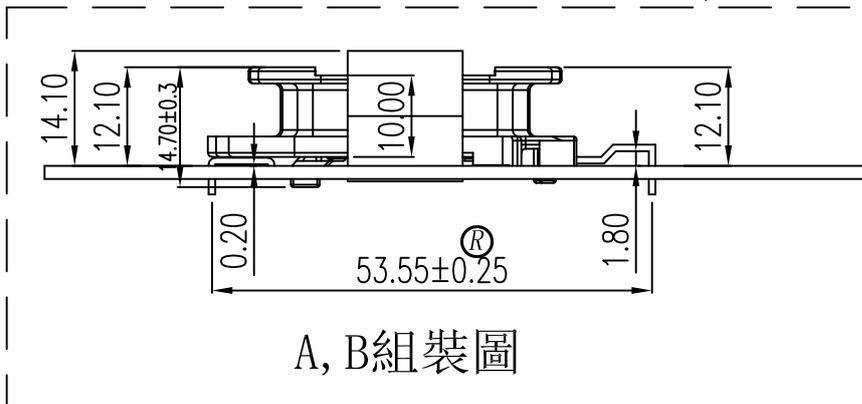

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R
24.80	14.50	17.30	5.30	4.80	14.40	13.70	6.10	10.00	6.70	2.90	2.40	26.30	7.00	16.20	PL	0.80	53.55
±0.3	±0.1	±0.2	±0.1	±0.2	±0.2	±0.2	±0.2	±0.2	±0.2	±0.1	±0.1	±0.3	±0.2	±0.3	±0.2	±0.05	±0.3

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-3716H(4P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 3705B	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		PIN TENSION LOAD 1.5 kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: DEC 13 2016	