


備註 (NOTE):

1. 材質: PET-FR530
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1Min
4. 模具狀況: 量產模
5. 與HX-4021A和HX-4018B裝配OK

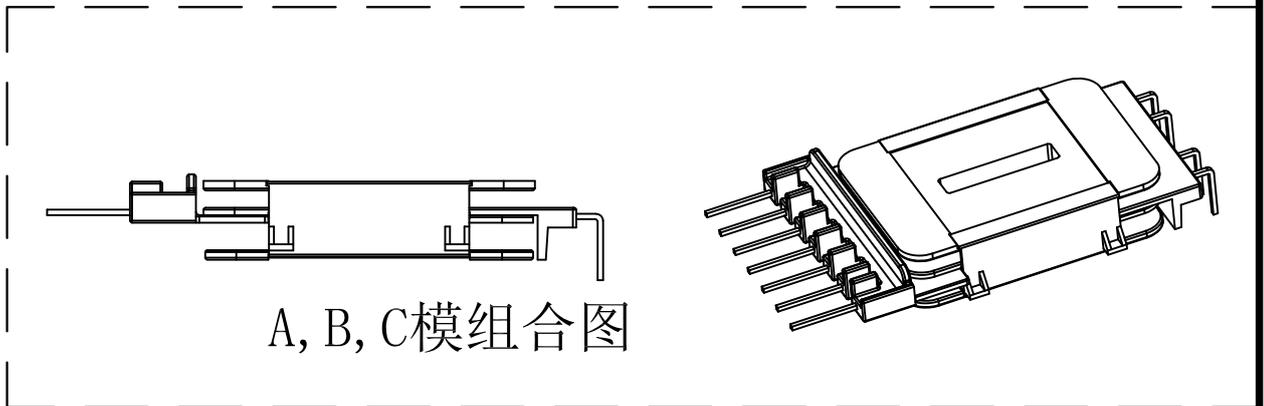

A, B, C 模組組合圖

A	B	C	D	E	F	G	H	I	J	K
29.00	10.95	0.60	4.10	0.60	3.85	5.30	6.10	29.60	3.50	22.00
±0.3	±0.2	±0.1	±0.2	±0.1	±0.1	±0.2	±0.2	±0.3	±0.1	±0.3

RoHS

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
A			C		
B			D		

NAME	EE-4115 CAP	MATERIAL	PET-FR530	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 4008C	PIN MATERIAL		UNIT	m/m	REV.	00
		PIN TENSION LOAD      kg MIN      UL REC. :94V0		TOLERANCE: 0<L≤4: ±0.1    4<L≤16: ±0.2    16<L≤63: ±0.3			
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		DRAWN & DRAFTED BY LIN HUA JING	CHECKED & APPROVED BY LIN GUO PING	DATE: OCT 15 2011			