


備註說明1:

- PART NO. : HX 4020A 量产模
- MATERIAL: PM-9823 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: EE-4012N
- MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80±0.05
- DIMENSION MARK : \triangle MAIN DIM., \otimes SECOND DIM, OTHERWISE ARE REFERENTIAL DIM.
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。

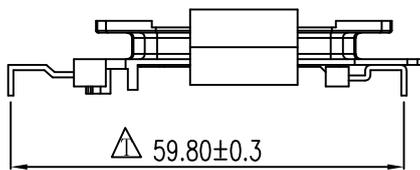

組合圖

備註說明2:

- 強度要求: 2.00kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: 450° ±10° 3SEC
- 拉力: 焊後拉力 2.00kg MIN
- 模具狀況: 正式模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-4012N(6P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 4020A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00



东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.
TEL:0769-86388088 86388188 86388288 FAX:0769-86388111
http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com

TOLERANCE OF PIN DIA	±0.05	
PIN TENSION LOAD	kg MIN	UL REC. :94V0
TOLERANCE:	0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY
DATE:	NOV 27 2014	