



HX-4022A

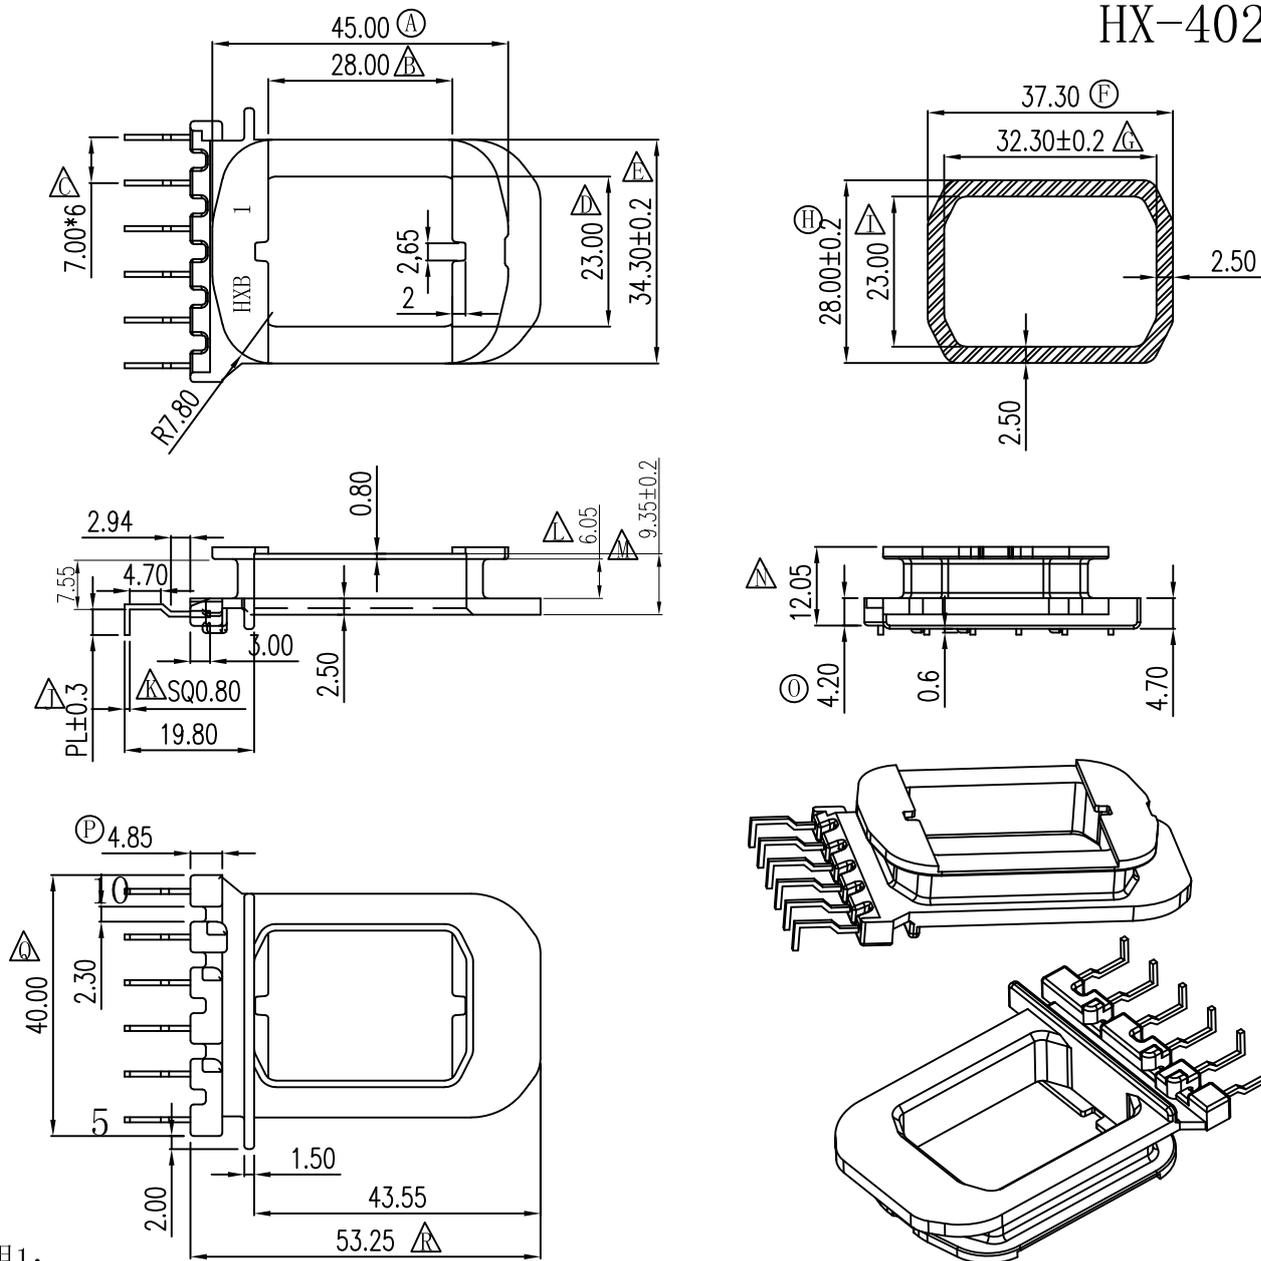

備註說明1:

- PART NO. : HX 4022A 量产模
 - MATERIAL: PM-9820 MUST MEET UL94V-0
 - COLOR: BLACK
 - CORE TYPE: EE-4017H
 - MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80±0.05 7. 強度要求: 3.00kg MIN
 - DIMENSION MARK : \triangle MAIN DIM., \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM. 8. 拉力要求: 焊錫前2.50kg MIN 焊錫後3.50kg MIN
- 标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。

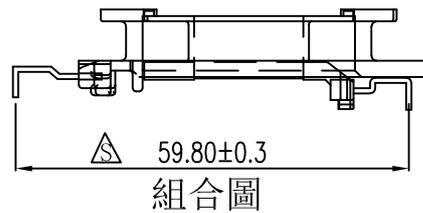

| | | | | | | | | | | | | | | | | | | | | |
|-------|-------|------|-------|-------|-------|-------|-------|-------|------|-------|------|------|-------|------|------|-------|-------|-------|---|---|
| A | B | C | D | E | F | G | H | I | J | K | L | M | N | O | P | Q | R | S | T | U |
| 45.00 | 28.00 | 7.00 | 23.00 | 34.30 | 37.30 | 32.30 | 28.00 | 23.00 | PL | 0.80 | 6.05 | 9.35 | 12.05 | 4.20 | 4.85 | 40.00 | 53.25 | 59.80 | | |
| ±0.3 | ±0.3 | ±0.2 | ±0.3 | ±0.2 | ±0.3 | ±0.2 | ±0.2 | ±0.3 | ±0.3 | ±0.05 | ±0.2 | ±0.2 | ±0.3 | ±0.2 | ±0.2 | ±0.3 | ±0.3 | ±0.3 | | |

| | |
|------|--------------------|
| 客户确认 | RoHS HF |
| 签回 | |

| | | | | | |
|------|-----------------|------|-----|-----------------|------|
| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| | | | | | | | |
|--|--------------|----------------------------|--------------|-----------------------|-----|---|-------------|
| NAME | EE-4017H(6P) | MATERIAL | PM-9820 | SCALE | 1:1 | ANGLE | ±1° |
| DRAWING NO. | HX 4022A | PIN MATERIAL | CP WIRE | UNIT | m/m | REV. | 00 |
| | | TOLERANCE OF PIN DIA ±0.05 | | | | UL REC. :94V0 | |
| | | PIN TENSION LOAD kg MIN | | | | TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3 | |
| 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com | | DRAWN & DRAFTED BY | LIN HUA JING | CHECKED & APPROVED BY | | DATE: | JAN 23 2016 |