


備註說明1:

1. PART NO. : HX 4026A 量產模
2. MATERIAL: PM-9820 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: EE-4011N
5. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80±0.05
6. DIMENSION MARK : Δ MAIN DIM., \textcircled{X} SECOND DIM, OTHERWISE ARE REFERENTIAL DIM. 標示的 Δ 为重要尺寸, 標示的 \textcircled{X} 为次要尺寸.

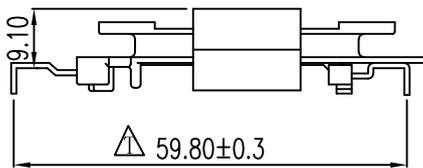

組合圖

備註說明2:

1. 強度要求: 2.00kg MIN
2. 耐壓要求: 4KV/1.5mA/1分鐘
3. 焊錫溫度: 450° ±10° 3SEC
4. 拉力: 焊後拉力 2.00kg MIN

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-4011N(6P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 4026A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. :94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAR 07 2016	