


備註說明:

1. 強度要求: 1.50kg MIN
2. 耐壓要求: 4.0KV/1.5mA/60S
3. 焊錫溫度: 450° ±10° 3SEC
4. 焊後拉力: 1.50kg MIN
5. PIN來回45° 彎折一次無折斷、龜裂。
6. 與HX-4040A匹配OK

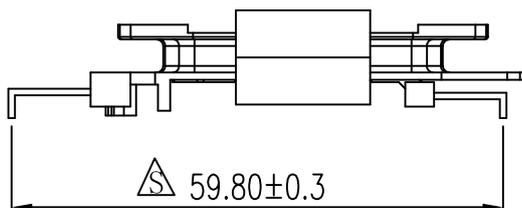

組合圖

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-4012N(4P)	MATERIAL	PM-9820	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-4040B	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD kg MIN				UL REC. :94V0	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: APR 15 2015	