

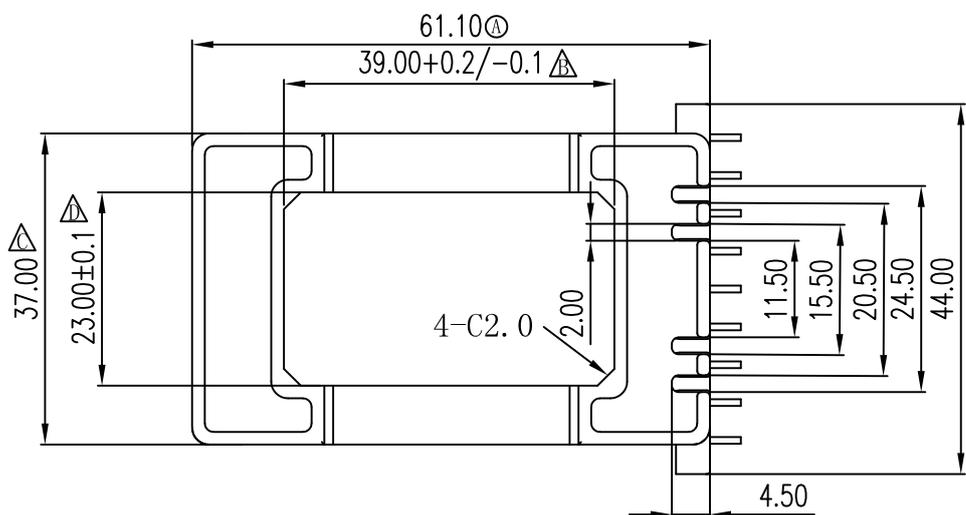
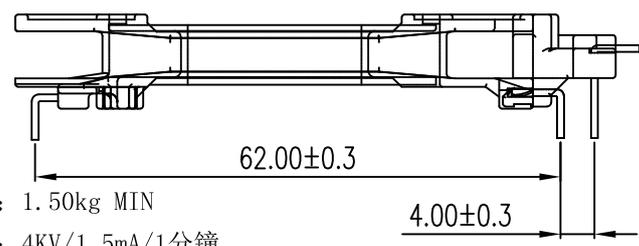
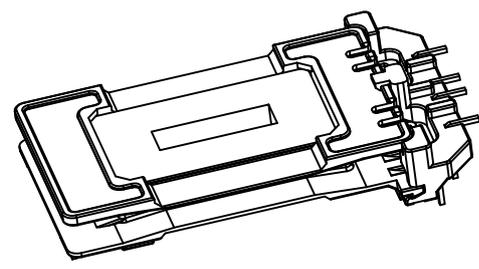
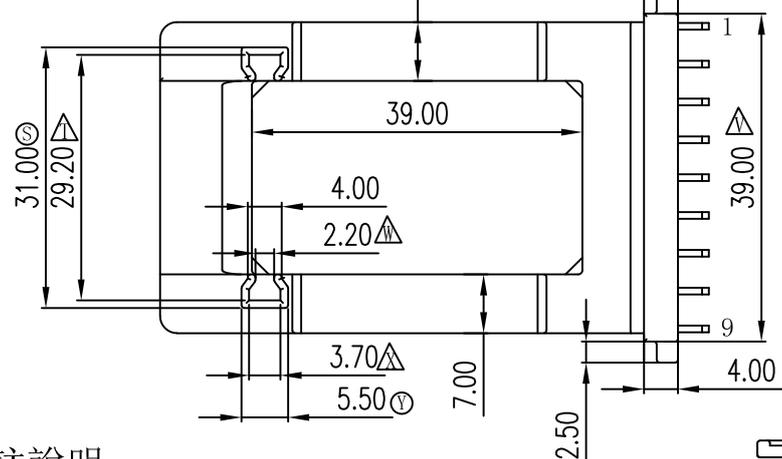
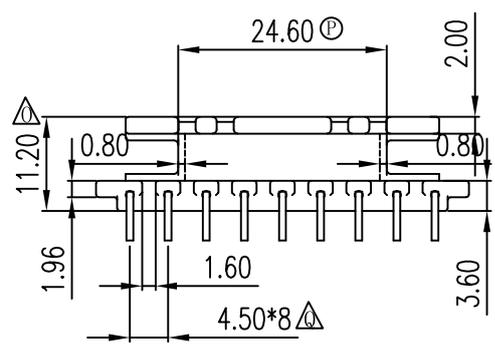


HX-4212A

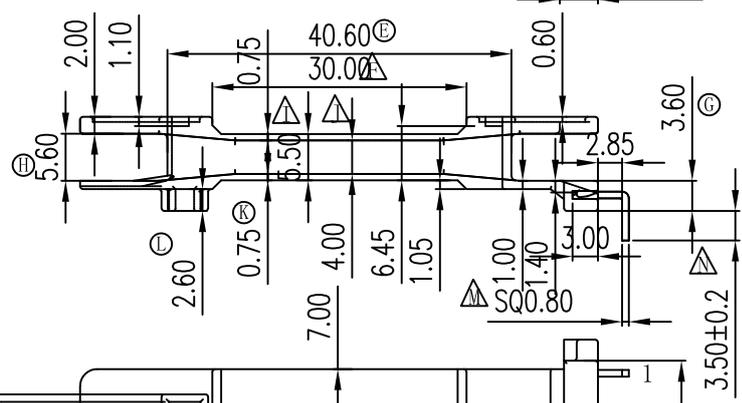

頂部葉片強度1.00kg MIN

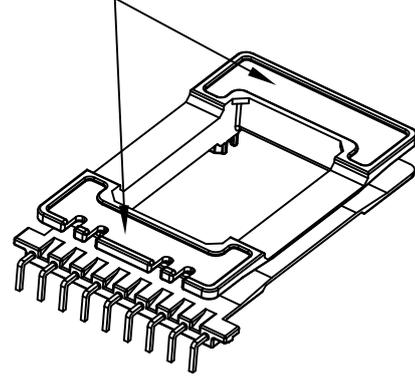

備註說明:

- PART NO. : HX-4212A 量產模
- MATERIAL: PM-9820 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: EE-4213
- MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80 ± 0.05
- DIMENSION MARK : \triangle MAIN DIM. , \otimes SECOND DIM, OTHERWISE ARE REFERENTIAL DIM. .
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。

- 強度要求: 1.50kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: 450° ± 10° 3SEC
- 拉力: 焊後拉力 1.5kg MIN
- HX-4212A與HX-4212B/C匹配OK

客户确认 签回 RoHS HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-4213 (9P)	MATERIAL	PM-9820	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-4212A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN					
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		UL REC. : 94V0			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: JUN 12 2014	