
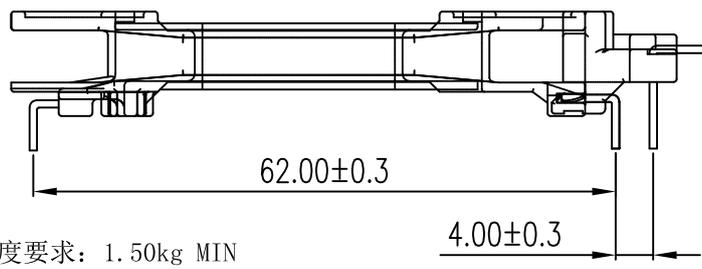
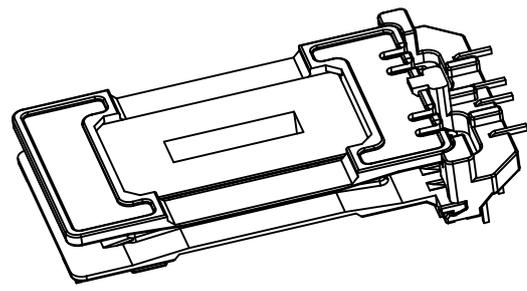
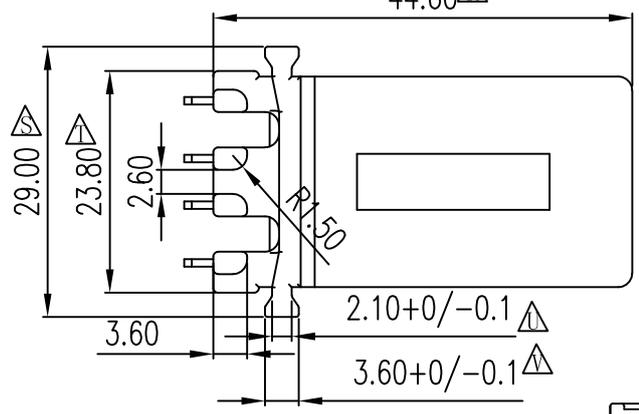
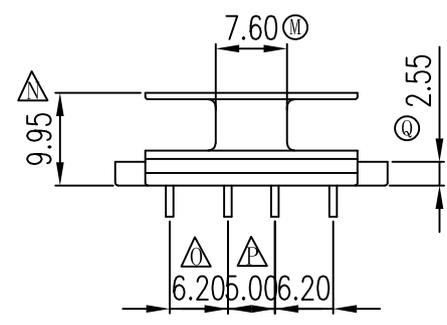
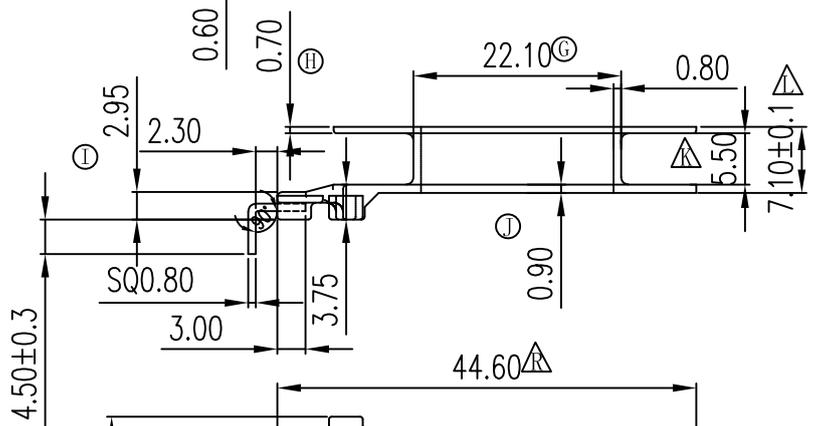
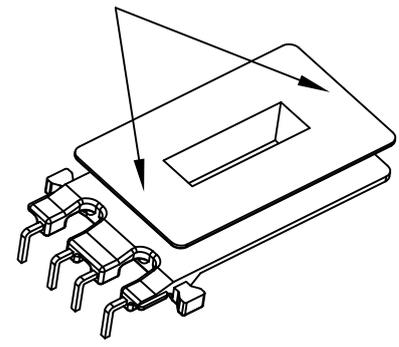


HX-4212B

頂部葉片強度1.00kg MIN

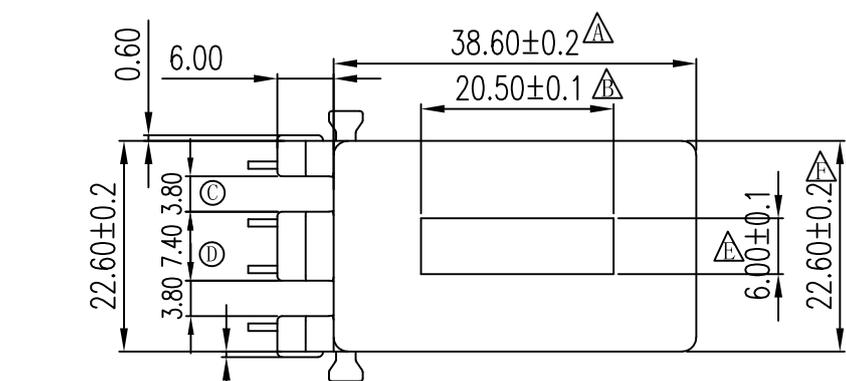

備註說明:

1. PART NO. : HX-4212B 量產模
2. MATERIAL: PM-9820 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: EE-4213
5. MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80±0.05
6. DIMENSION MARK : \triangle MAIN DIM., \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM.
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。
7. 強度要求: 1.50kg MIN
8. 耐壓要求: 4KV/1.5mA/1分鐘
9. 焊錫溫度: 450° ±10° 3SEC
10. 拉力: 焊後拉力 1.5kg MIN
11. HX-4212B與HX-4212A/C匹配OK

客户确认	RoHS HF
签回	

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-4213 (4P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-4212B	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		DRAWN & DRAFTED BY		CHECKED & APPROVED BY	
		LIN HUA JING					