

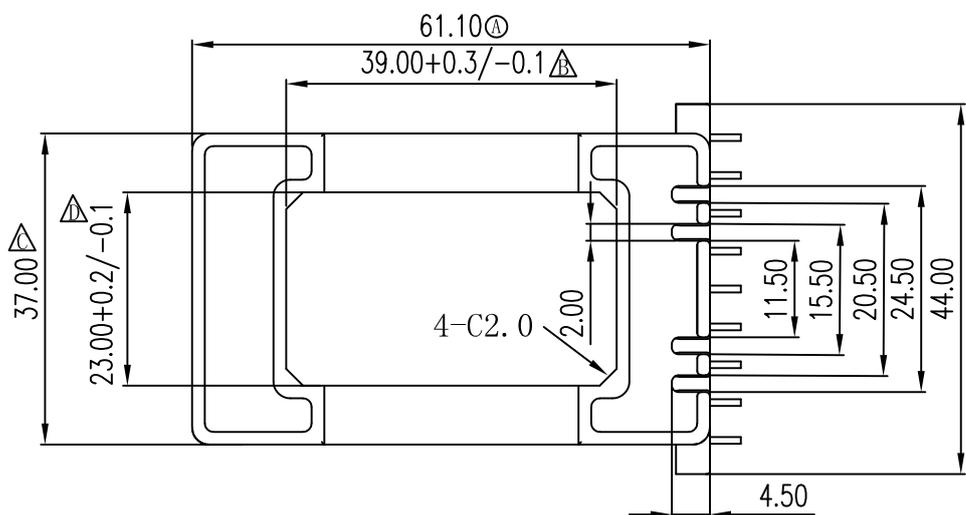
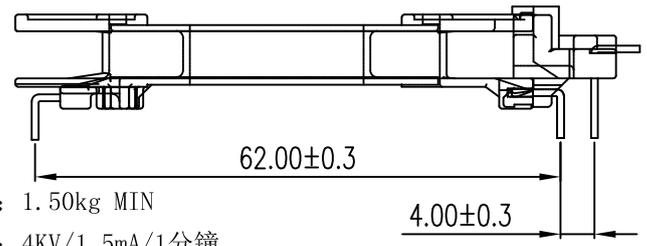
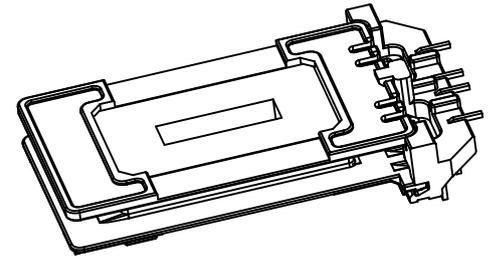
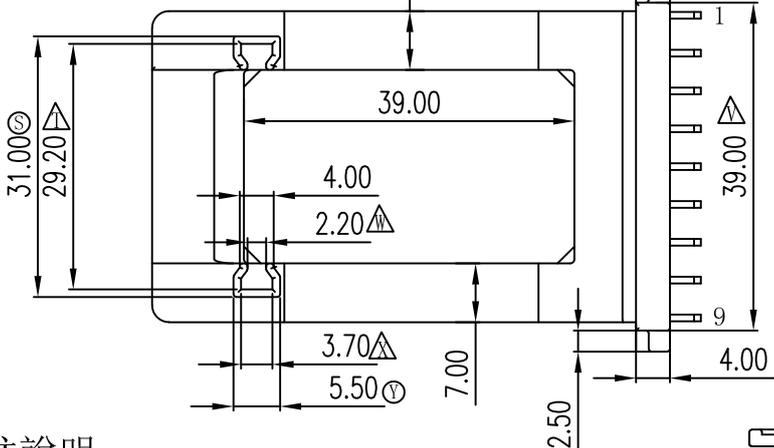
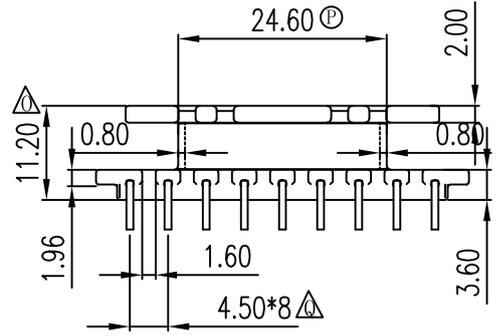


HX-4213A

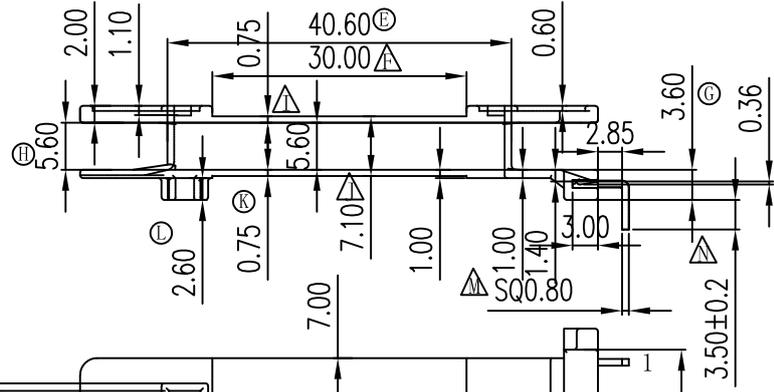

頂部葉片強度1.00kg MIN

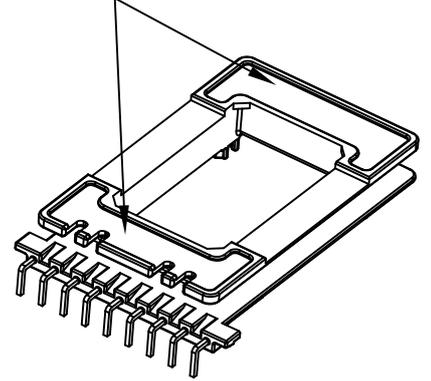

備註說明:

- PART NO. : HX-4213A 量產模
- MATERIAL: PM-9820 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: EE-4213
- MATERIAL OF PIN : 3/4H CP WIRE, SQ0.80±0.05
- DIMENSION MARK : \triangle MAIN DIM., \otimes SECOND DIM, OTHERWISE ARE REFERENTIAL DIM.
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。

- 強度要求: 1.50kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: 450° ±10° 3SEC
- 拉力: 焊後拉力 1.5kg MIN
- HX-4213A與HX-4212B/C匹配OK

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-4213 (9P)	MATERIAL	PM-9820	SCALE	1/1	ANGLE	±1°
DRAWING NO.	HX-4213A	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.5 kg MIN				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3		DRAWN & DRAFTED BY LIN HUA JING		CHECKED & APPROVED BY	
				DATE: JUN 12 2014			