



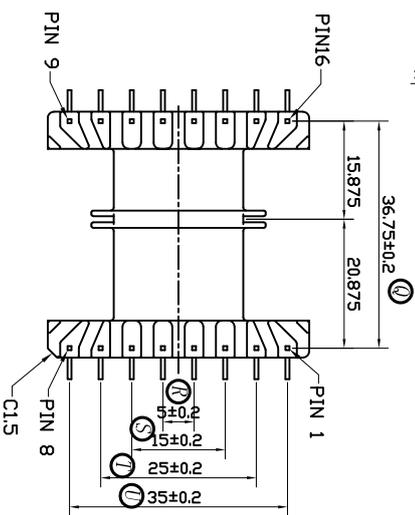
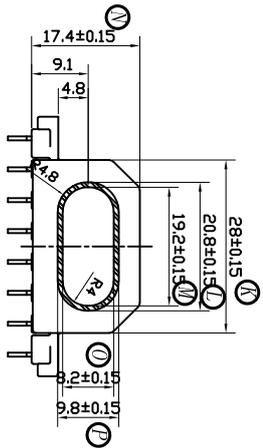



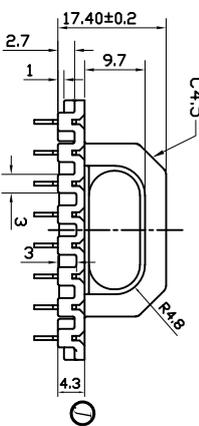
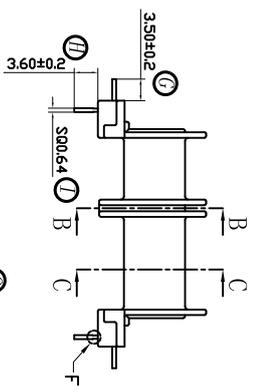



记号	日期	修改记录
1	2010/05/26	BASE两边外3个线槽深度3.0, 3.3改为2.7, 3.0 (mm)

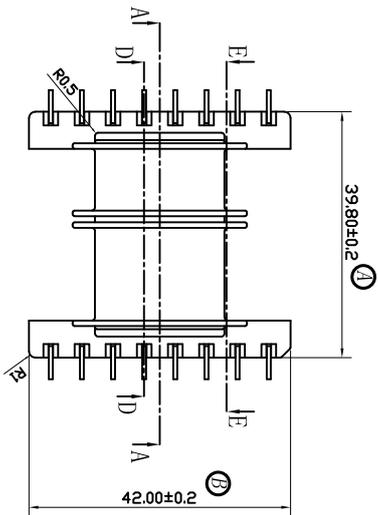

NOTE:

- PART NO. :
- MATERIAL: PHENOLIC PM-9820 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: EEP41
- MATERIAL OF PIN :3/4H CP WIRE,
- 此BOBBIN壁厚是0.64mm MIN.

7. TOLERANCES: (尺寸公差)

- | | |
|----------|-------|
| 0<L<=1 | ±0.06 |
| 1<L<=4 | ±0.1 |
| 4<L<=16 | ±0.15 |
| 16<L<=63 | ±0.2 |

NAME	EEP-41 (16P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 4102A	PIN MATERIAL		CP WIRE	UNIT	m/m	REV. 01
东莞市华欣塑胶制品有限公司		DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.		TOLERANCE OF PIN DIA. ±0.05		UL REC.: 94V0	
TEL: 0769-86388188 FAX: 0769-86388111		E-Mail: hxbohbhin@vip.163.com		PIN TENSION LOAD 1.5 kg/MIN		TOLERANCE:	
DESIGNED BY	LIN HUA JING	CHECKED BY	LIN GUO PING	DATE:	MAY 26 2010		

