

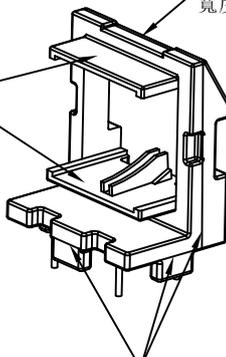


進膠口位置  
寬度6.00mm

葉片位置強度  
1.00kg MIN



紅色線條是合模線位置



### 備註說明:

1. 材質: T375HF
2. 強度要求: 2.50kg MIN, 葉片位置是1.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊前是1.00kg MIN, 焊後是1.5kg MIN
6. 模具狀況: 正式模

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T	U	客户确认		RoHS HF
19.00	16.00	5.60	13.00	3.00	16.50	17.20	19.10	6.70	4.20	PL	10.00	0.80	10.90	13.80	30.10	24.60	17.40	7.00	6.20		签回		
±0.3	±0.2	±0.2	±0.15	±0.1	±0.3	±0.3	±0.3	±0.2	±0.2	±0.2	±0.15	±0.05	±0.2	±0.2	±0.3	±0.3	±0.3	±0.2	±0.2				
REV.	REVISION RECORD										DATE	REV	REVISION RECORD					DATE					
01												03											
02												04											

NAME	ET-24(4P)	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 2405	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>				TOLERANCE OF PIN DIA ±0.05			
				PIN TENSION LOAD 1.5 kg MIN		UL REC.: 94V0	
				TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: APR 21 2005	