







记号	日期	修改记录

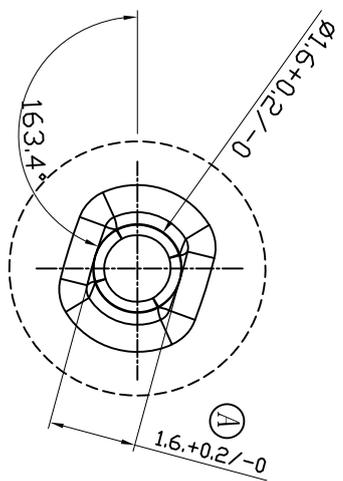

DETAIL A
SCALE 3:1


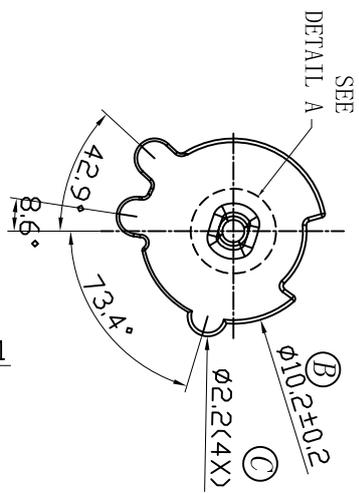


SEE
DETAIL A

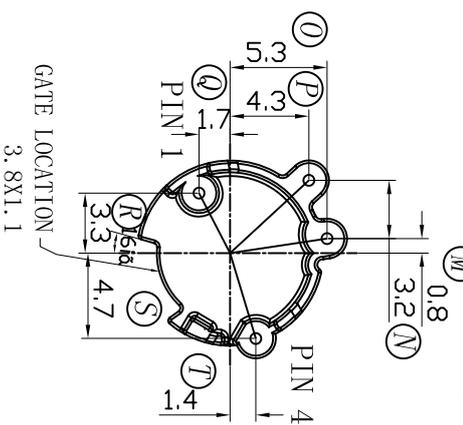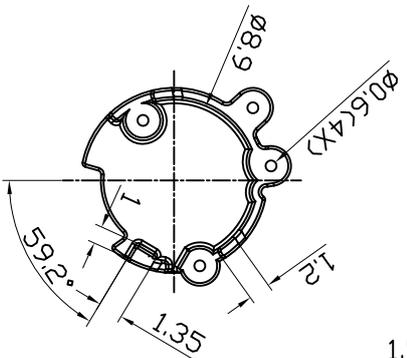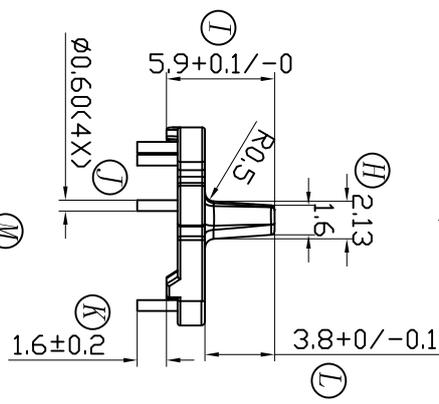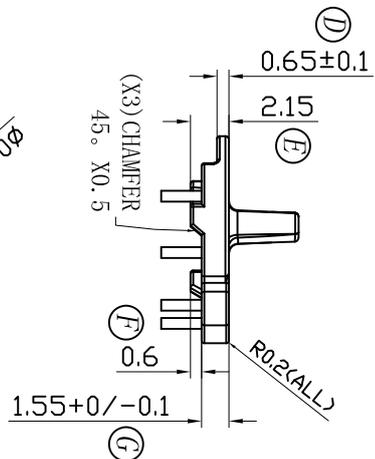

NOTE:

- PART NO. :
- MATERIAL: PHENOLIC (PM-9630) MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: □ 0.2BASE
- MATERIAL OF PIN : 3/4H CP WIRE, $\phi 0.60 \pm 0.05\text{mm}$
- MUST MARK CAVITIES NO AND PIN NO., FOR DELTA ASSET MUST MARK DELTA'S LOGO AND DELTA'S PART NO.
- ALL OF FILLETS AND ROUNDS WITHOUT INDICATION ARE 0.2R
- TOLERANCES: (尺寸公差)



	X. X	X. XX
0-10	± 0.2	± 0.08
10-20	± 0.3	± 0.15
ABOVE20	± 0.5	± 0.25
ANGULAR DIMS	$\pm 1/2 \text{ DEG}$	



NAME	□ 0.2BASE (4P)	MATERIAL	PM-9630	SCALE	2:1	ANGLE	45°
DRAWING NO.	HX B027	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司		DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.		TOLERANCE OF PIN DIA. ± 0.05		UL REC.: 94V0	
TEL.: 0769-86388188 FAX: 0769-86388111		E-Mail: hxbob@hxpj.com		PIN TENSION LOAD 1.0 kg/MIN		TOLERANCE:	
DRAWN & CHECKED BY: LIN HUA JING		DESIGNED BY: LIN HUA JING		CHECKED & APPROVED BY: LIN GUO PING		DATE: OCT 08 2010	