
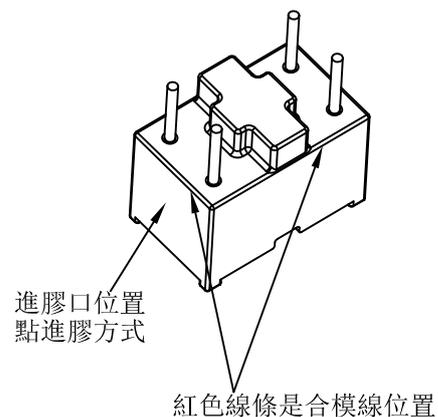


備註說明:

1. 材質: PET-FR530
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 380° ±10° 3SEC
5. 拉力: 焊前/後是1.0kg MIN
6. 模具狀況: 樣品模



RoHS

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
A			C		
B			D		

NAME	T9*5*3C BASE	MATERIAL	PET-FR530	SCALE	1:1	ANGLE	±1°	
DRAWING NO.	HX B052	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH ±0.20				PIN TENSION LOAD kg MIN		UL REC. :94V0
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3				DRAWN & DRAFTED BY		LIN HUA JING