


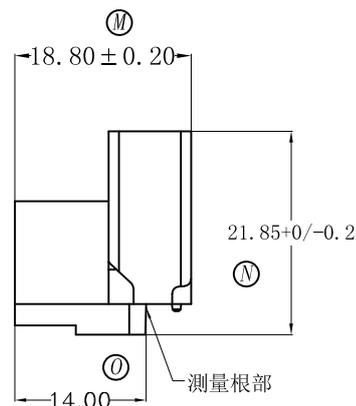
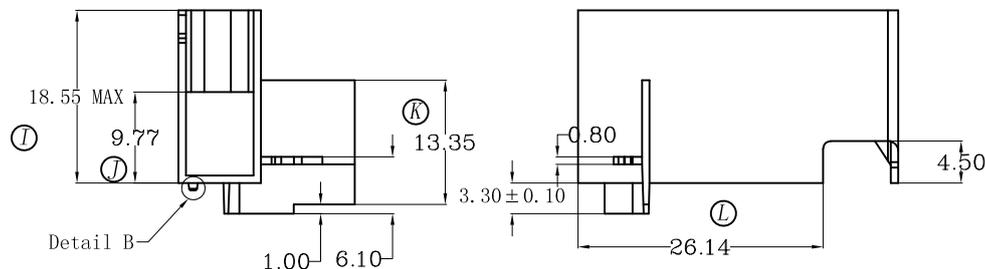
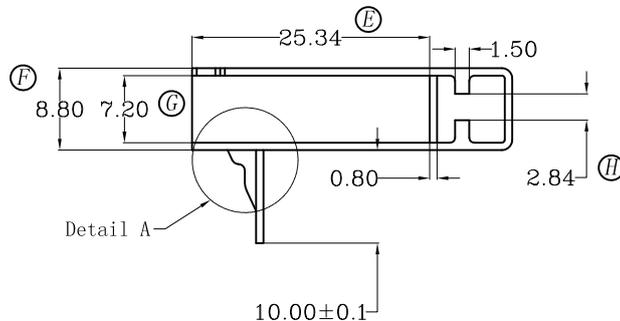


DetailA  
2:1

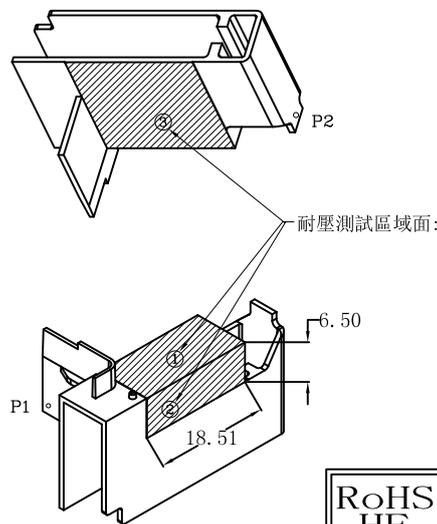

DetailB  
8:1

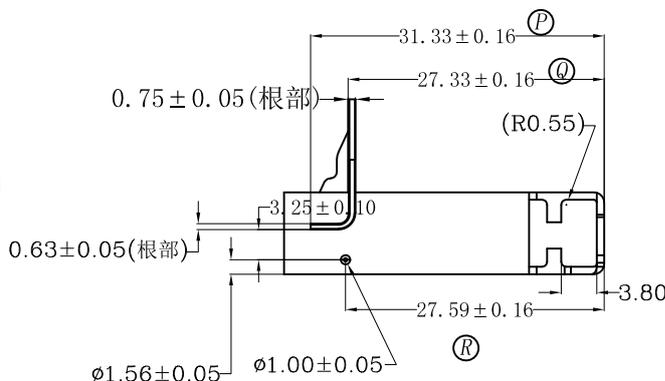

强度要求：  
用推力计测试产品PIN座、档墙任何  
角度要求能承受最小1.5KG的力不破。  
除特殊点1, 2/1.5KG Min.外, 任意  
点3KG Min..

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
A			C		
B			D		

NAME	BASE	MATERIAL	LCP-E4008	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX B062A	PIN MATERIAL		UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH		±0.20			
		PIN TENSION LOAD		kg MIN	UL REC. :94V0		
		TOLERANCE: 0<L≤4: ±0.1		4<L≤16: ±0.2	16<L≤63: ±0.3		
DRAWN & DRAFTED BY		LIN HUA JING	CHECKED & APPROVED BY		DATE: JUL 05 2019		