


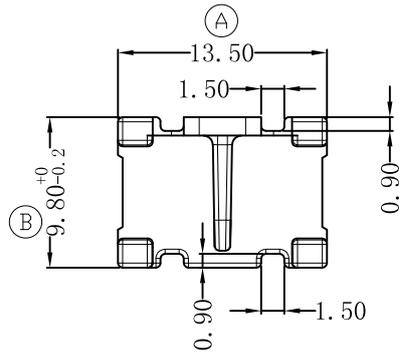


HX-B063


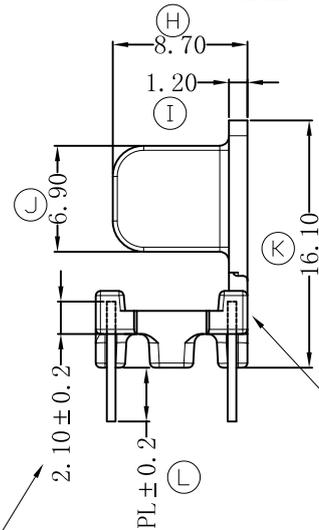


紅色線條位置是合模線

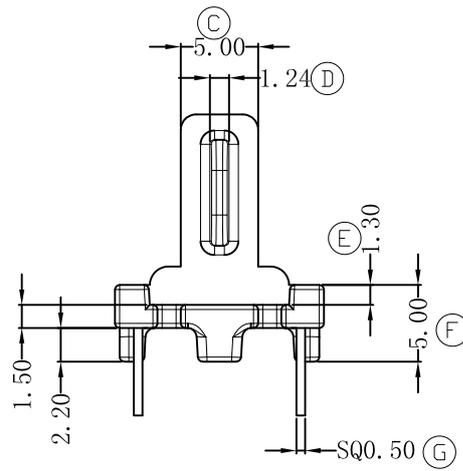

進膠口位置

植PIN深度尺寸

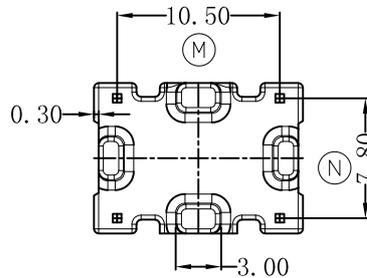

備註說明:

1. 材質: T375HF
2. 強度要求: 1.0kg MIN
3. 焊後拉力: 1.0kg MIN

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	SQ13-BASE	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-B063	PIN MATERIAL	CP WIRE	UNIT	mm	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com	TOLERANCE OF PIN DIA ±0.05		— ⊕ —				
	PIN TENSION LOAD kg MIN		UL REC. :94V0				
	TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3						
DRAWN & DRAFTED BY	LIAN YE JIAN	CHECKED & APPROVED BY	TANG AI PING	DATE:	AUGUST 06 2019		