
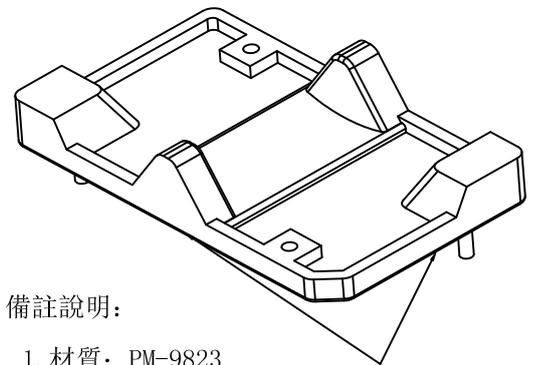
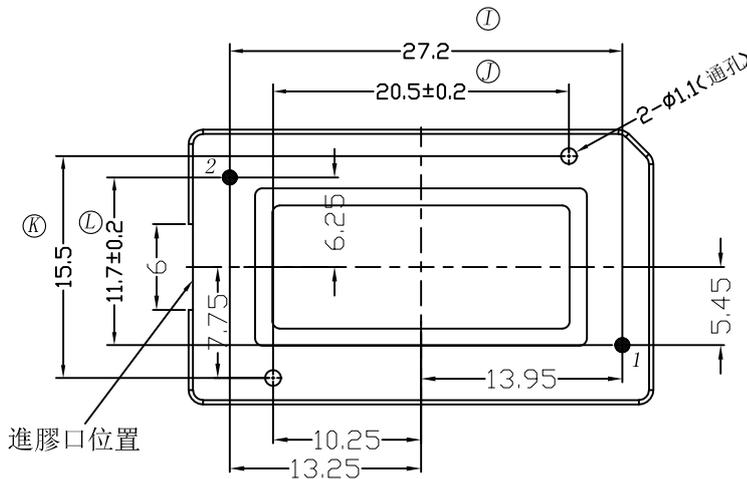
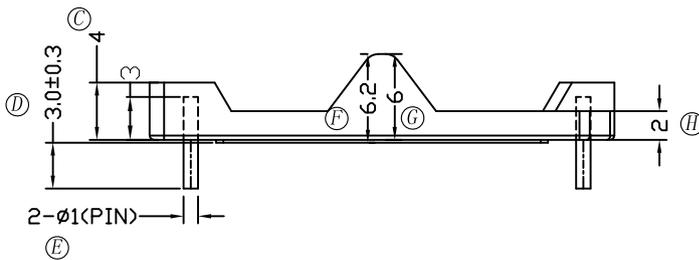

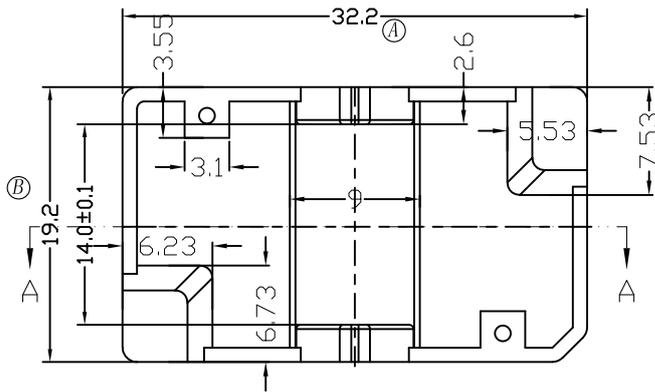


记号	日期	修改记录

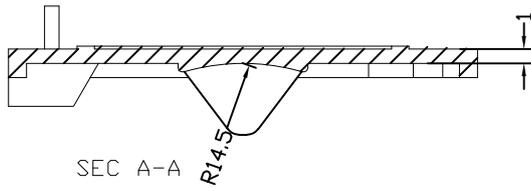

備註說明:

1. 材質: PM-9823
紅色線條位置是合模線
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後2.5kg MIN
6. 模具狀況: 量產模

A	B	C	D	E	F	G	H	I	J	K	L
32.20	19.20	4.00	3.00	1.00	6.20	6.00	2.00	27.20	20.50	15.50	11.70
±0.3	±0.3	±0.2	±0.3	±0.05	±0.2	±0.2	±0.1	±0.3	±0.2	±0.2	±0.2

客户确认
簽回

RoHS

NAME	BASE	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HXB064	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN PITCH ±0.20				UL REC.: 94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com		PIN TENSION LOAD kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		TANG AI PING		CHECKED & APPROVED BY		DATE: OCT 08 2019	