


记号	日期	修改记录

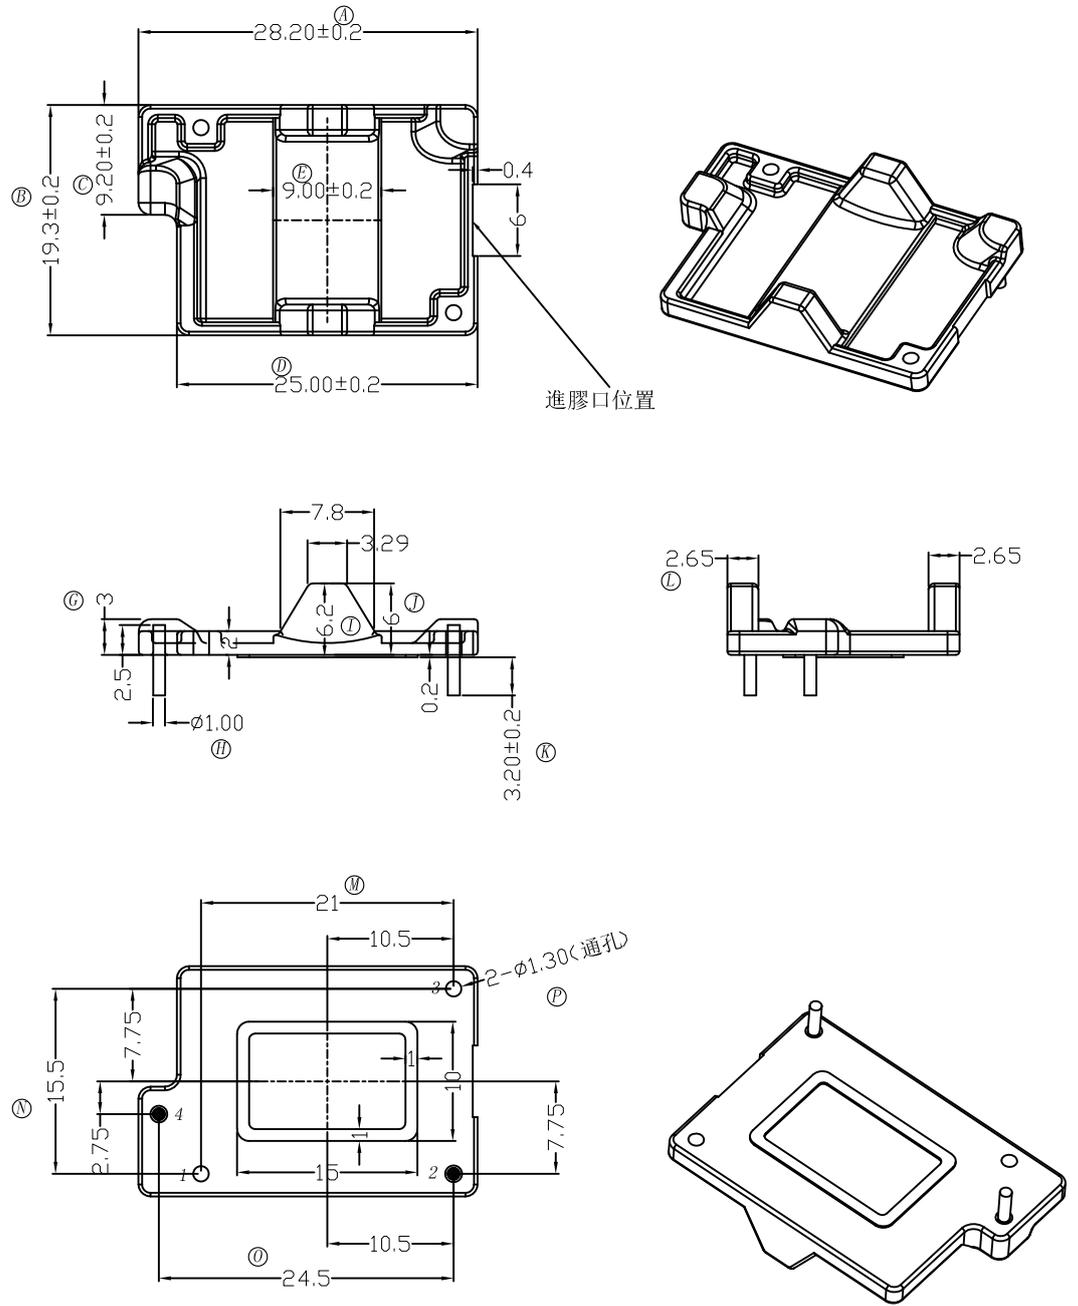

備註說明:

1. 材質: PM-9823
2. 強度要求: 2.00kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後2.5kg MIN
6. 模具狀況: 量產模

客户确认  
簽回



NAME	BASE	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°		
DRAWING NO.	HX B070	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00		
<b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH ±0.20		—⊕—		UL REC.: 94V0			
		PIN TENSION LOAD kg MIN		TOLERANCE: 0<L<4: ±0.1		4<L<16: ±0.2		16<L<63: ±0.3	
		DRAWN & DRAFTED BY TANG AI PING		CHECKED & APPROVED BY		DATE: NOV 29 2019			