

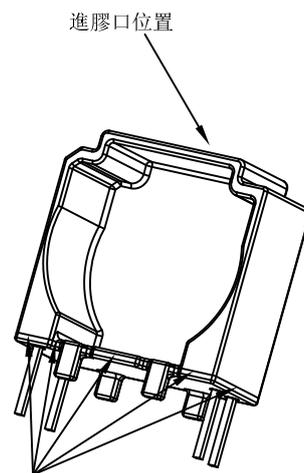
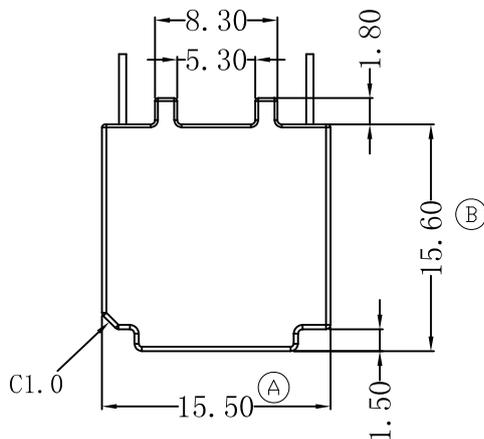
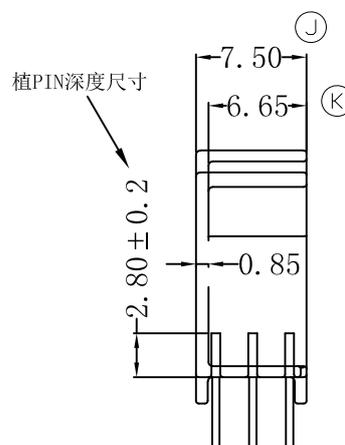





HX-B078

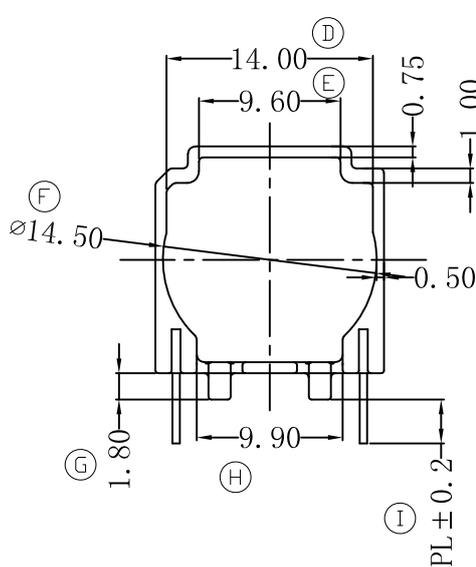

紅色線位置是合模線



凸點強度: 1.5kg MIN,

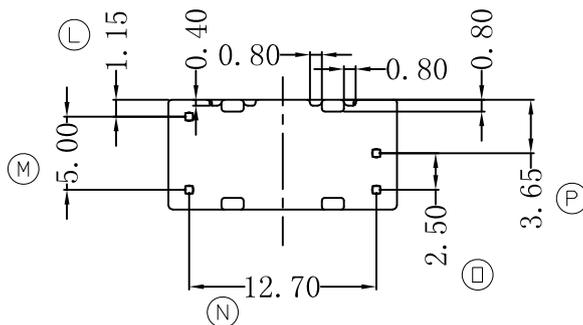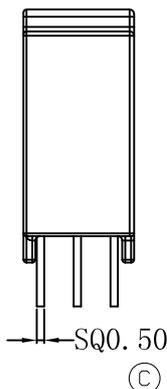

備註說明:

1. 材質: PA66-FR52G30
2. 強度要求: 1.8kg MIN,
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 380° ± 10° 1SEC
5. 拉力: 焊後拉力 1.2kg MIN
6. 模具狀況: 正式模

客户确认
簽回

RoHS

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	T11X7X3C (4P)	MATERIAL	PA66-FR52G30	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-B078	PIN MATERIAL	CP WIRE	UNIT	mm	REV.	00
<p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p>		TOLERANCE OF PIN DIA ±0.05				PIN TENSION LOAD kg MIN	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3				UL REC.: 94V0	
DRAWN & DRAFTED BY		IAN YE JIAN		CHECKED & APPROVED BY		DATE: MAY 11 2020	