
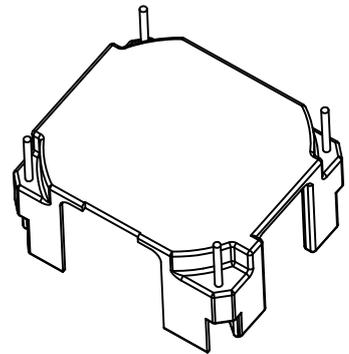
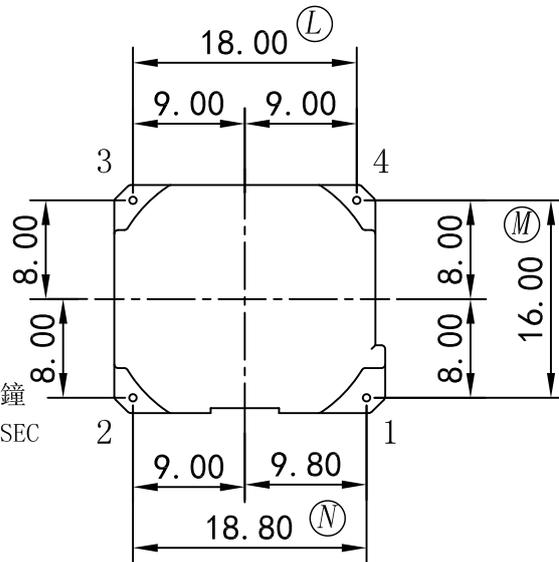
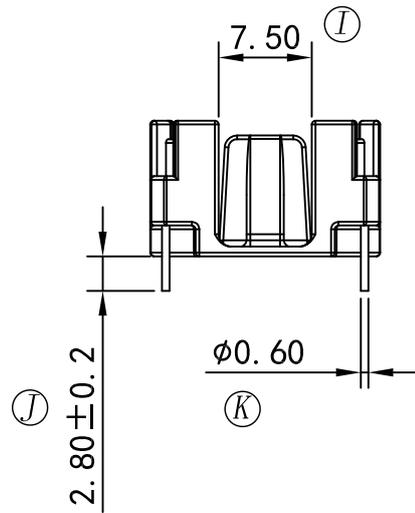
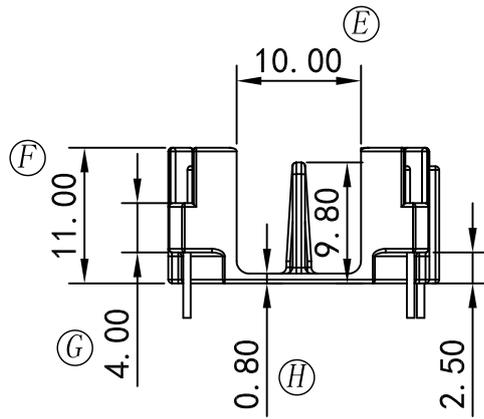
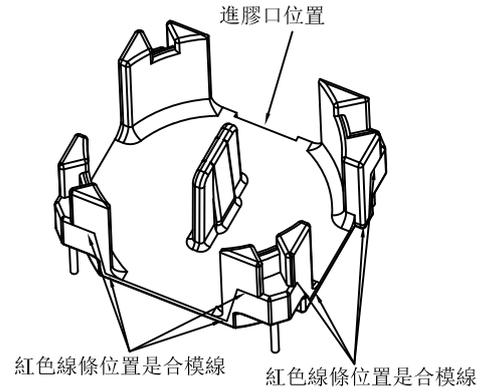


# HX-B097

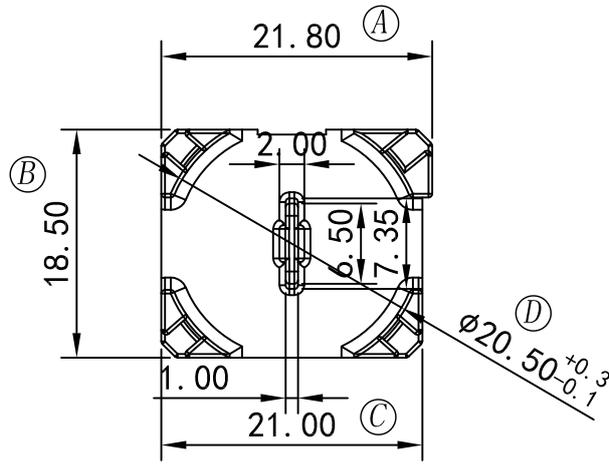

**備註說明:**

1. 材質: PM-9823
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 焊錫前拉力: 1.00kg MIN  
焊錫後拉力: 1.50kg MIN
6. 模具狀況: 量產模
7. 半成品須要燒烤, 條件是180° 溫度、4小時。

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	T17X8X7 BASE(4P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-B097	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 <b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD kg MIN				UL REC. :94V0	
		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: DEC 04 2021	