

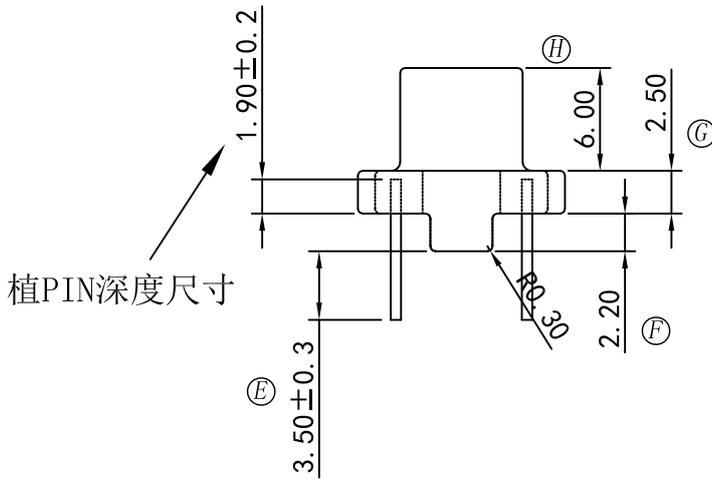
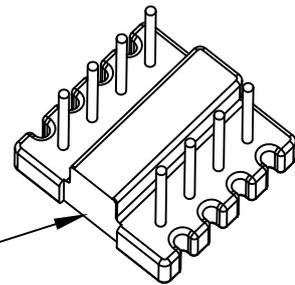


紅色位置是合模線

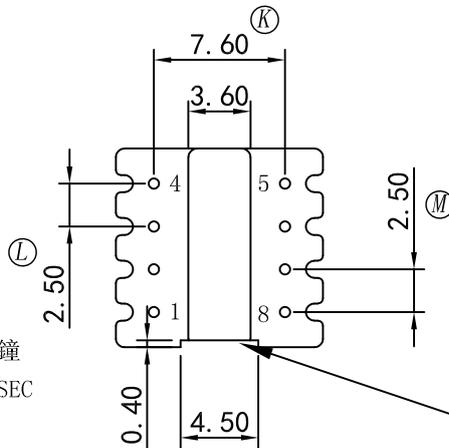

植PIN深度尺寸

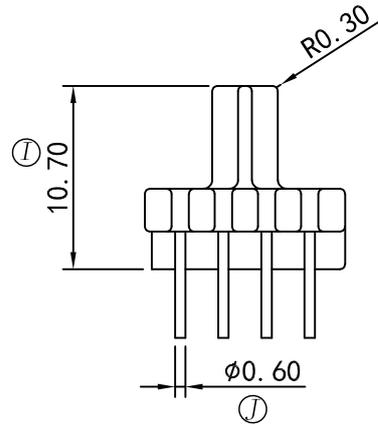

進膠口位置

備註說明:

1. 材質: WH-8100
2. 強度要求: 2.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 焊錫前拉力: 1.00kg MIN
焊錫後拉力: 1.50kg MIN
6. 模具狀況: 量產模
7. PIN來回90° 彎折一次無折斷、龜裂。

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	B-B700 BASE (8P)	MATERIAL	WH-8100	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-B102	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05					
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		PIN TENSION LOAD kg MIN		UL REC. : 94V0			
		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: JUL 23 2024	