






记号

日期

修改记录

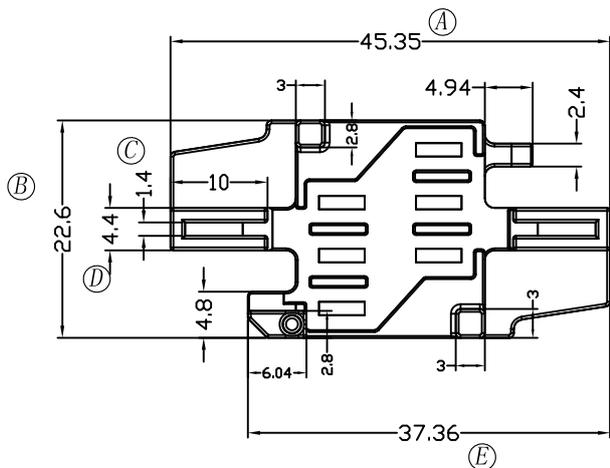


平貼度0.20mm MAX

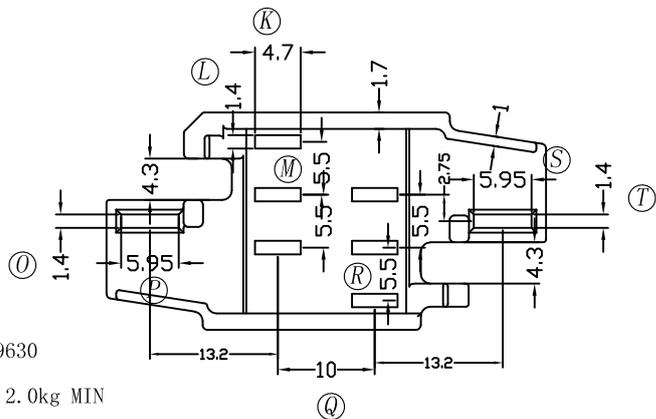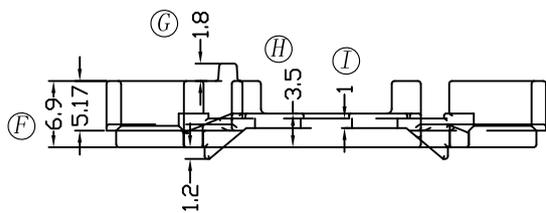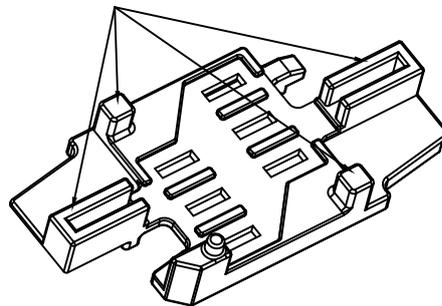

備註說明:

- 1. 材質: PM-9630
- 2. 強度要求: 2.0kg MIN
- 3. 耐壓要求: 4KV/1.5mA/1分鐘
- 4. 模具狀況: 量產模

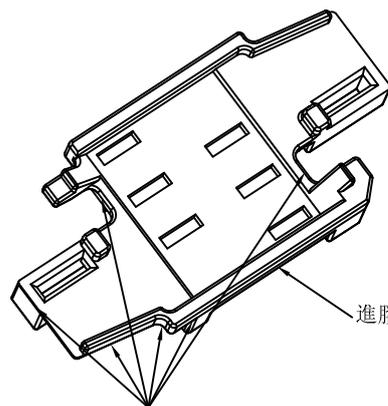

紅色線條位置是合模線

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
45.35	22.60	1.40	4.40	37.36	6.90	1.80	3.50	1.00	2.80	4.70	1.40	5.50		1.40	5.95	10.00	5.50	5.95	1.40
±0.3	±0.3	±0.1	±0.2	±0.3	±0.2	±0.1	±0.1	±0.1	±0.1	±0.2	±0.1	±0.2		±0.1	±0.2	±0.2	±0.2	±0.2	±0.1

客户确认  
签回



NAME	CC-45.6-26 BASE	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-B112	PIN MATERIAL		UNIT	m/m	REV.	00
		东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388188 FAX: 0769-86388111 E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH ±0.20 PIN TENSION LOAD kg MIN TOLERANCE: 0<L<4:±0.1    4<L<16:±0.2		 UL REC.: 94V0 16<L<63±0.3	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	MAY 20 2024		