

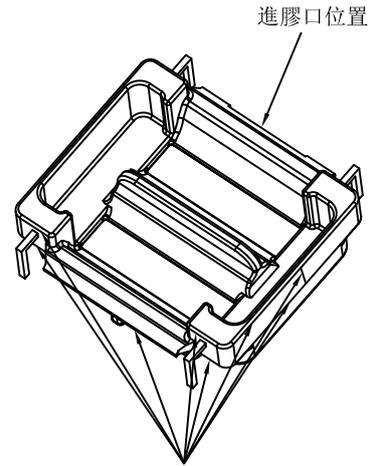
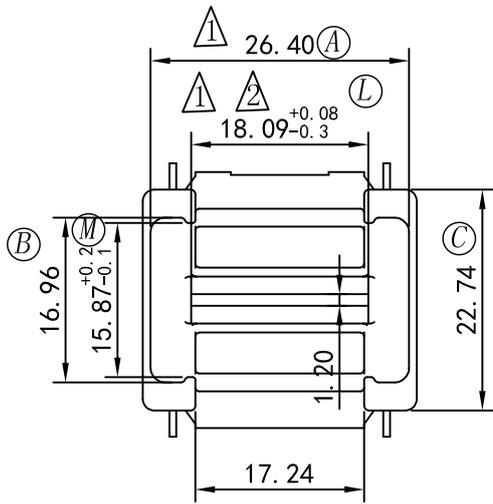
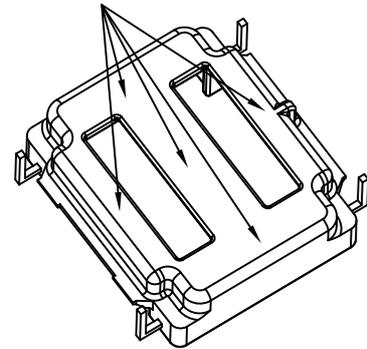
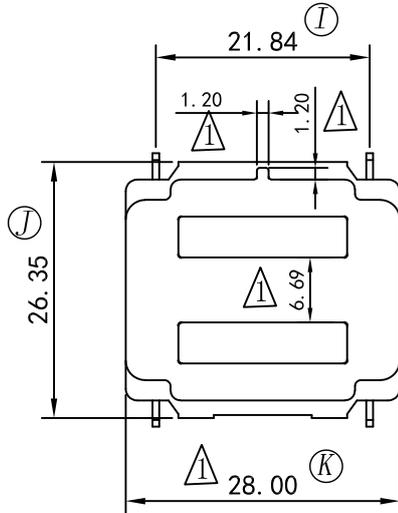


HX-B124

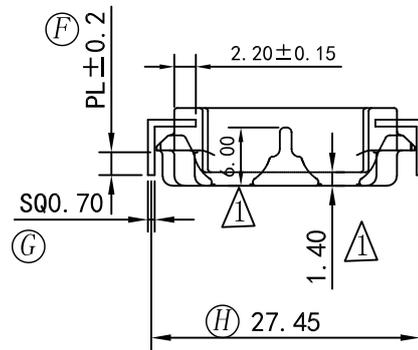

紅色線條位置是合模線

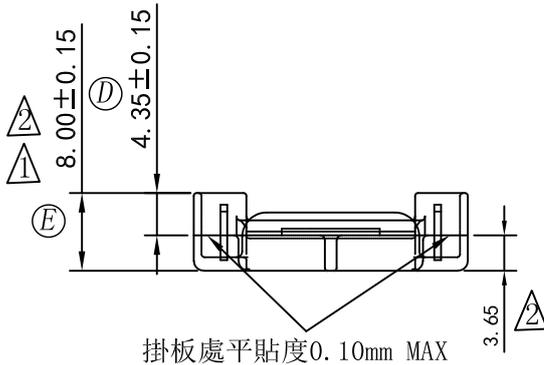

備註 (NOTE):

1. 材質 (Material): PM-9630
2. 強度要求 (Strength requirement): 2.0kg MIN
3. 耐壓要求 (HI-POT requirements): 4KV/1.5mA/1Min
4. 焊錫溫度 (Soldering temperature): 450° ± 10° 3SEC
5. 拉力 (Pull): 焊後拉力 (After welding tension) 1.5kg MIN
6. 模具狀況 (The mould status): 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	A尺寸25.74改為26.40; E尺寸7.30改為7.80; K尺寸27.34改為28.00; 尺寸14.0改為15.94; 尺寸5.5改為6.0; 尺寸0.9改為1.4; 尺寸3.54改為6.69; 增加箭條1.2*1.2	2024/12/14	03		
02	D尺寸7.80改為8.00; 尺寸15.94改為18.09; 尺寸3.45改為3.65	2024/12/27	04		

NAME	T23 BASE (4P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-B124	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	02
		TOLERANCE OF PIN DIA ±0.05					
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.		PIN TENSION LOAD kg MIN		UL REC. : 94V0			
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3					
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	APR 10 2025