

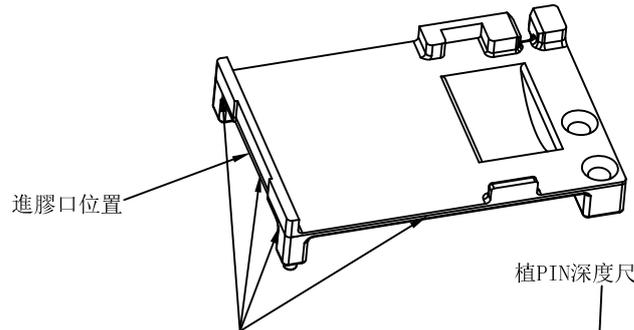
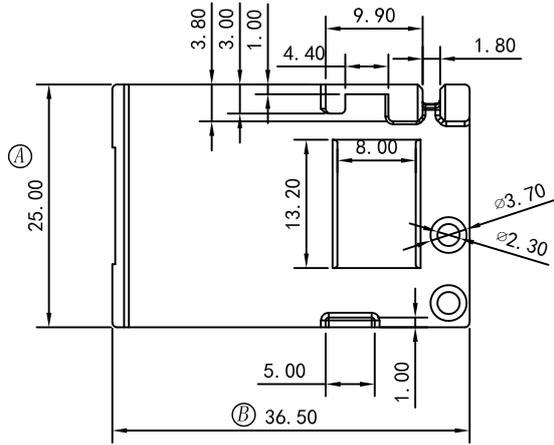
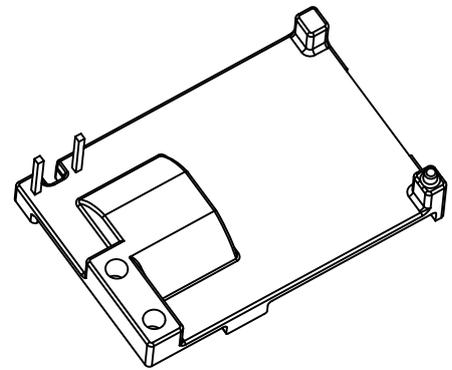
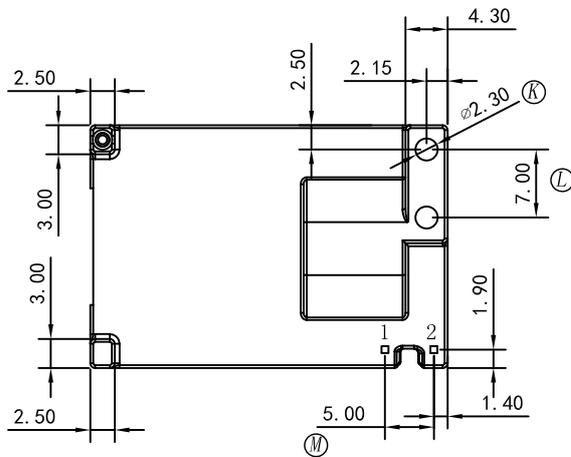


# HX-B130

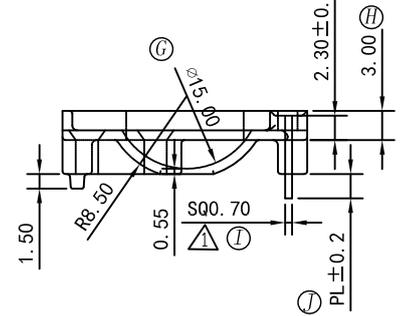

紅色線條是合模線位置

植PIN深度尺寸

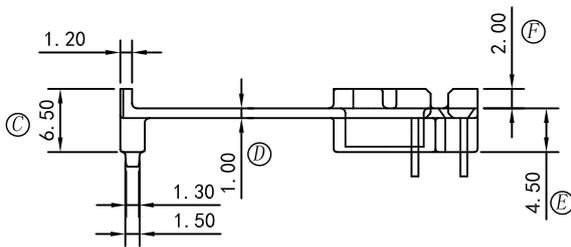

備註 (NOTE):

1. 材質 (Material): PM-9630
2. 強度要求 (Strength requirement): 2.0kg MIN
3. 耐壓要求 (HI-POT requirements): 4KV/1.5mA/1min
4. 焊錫溫度 (Soldering temperature): 450° ± 10° 3SEC
5. 拉力 (Pull): 焊後拉力 (After welding tension) 1.5kg MIN
6. 模具狀況 (The mould status): 樣品模

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	△ I尺寸圓0.80改為方0.70	2025/02/24	03		
02			04		

NAME	EQ-25 BASE (2P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX-B130	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
 <b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05					
		PIN TENSION LOAD kg MIN				UL REC. : 94V0	
		TOLERANCE: 0 < L < 4: ±0.1 4 < L < 16: ±0.2 16 < L < 63: ±0.3					
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: FEB 24 2025	