


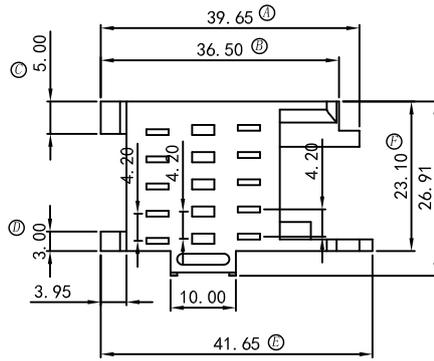

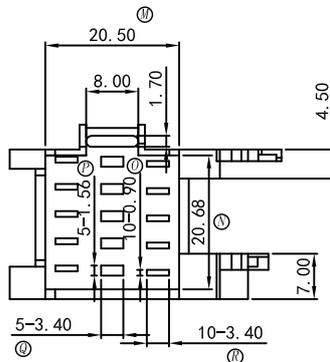



HX-B131

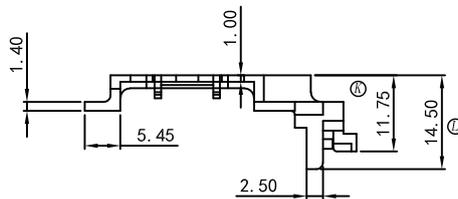

紅色線條是合模線位置

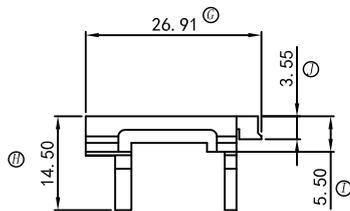

進膠口位置


備註 (NOTE):

1. 材質 (Material): PM-9630
2. 強度要求 (Strength requirement): 1.5kg MIN
3. 耐壓要求 (HI-POT requirements): 4KV/1.5mA/1Min
4. 焊錫溫度 (Soldering temperature): 450° ±10° 3SEC
5. 模具狀況 (The mould status): 樣品模

客户确认
簽回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EQ-3225 BASE	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-B131	PIN MATERIAL		UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com	TOLERANCE OF PIN DIA ±0.05						
	PIN TENSION LOAD kg MIN				UL REC. : 94V0		
	TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3						
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	JUN 02 2025		