

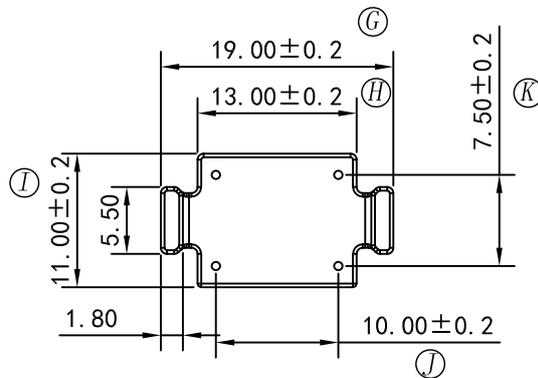
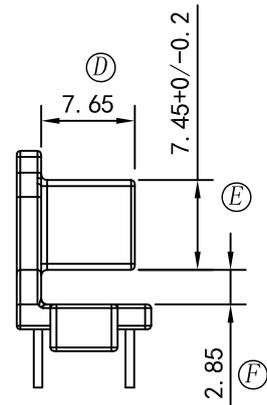
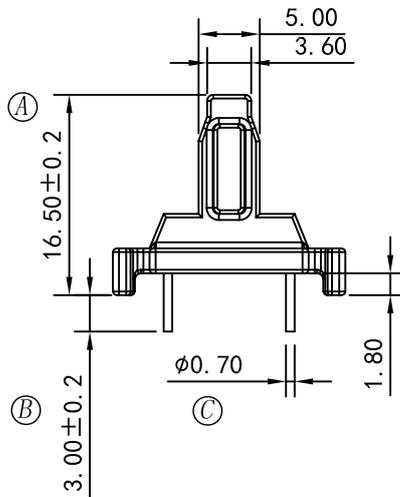
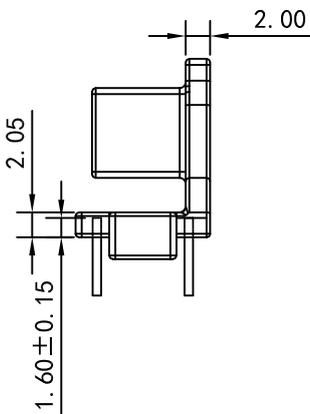



# HX-B135

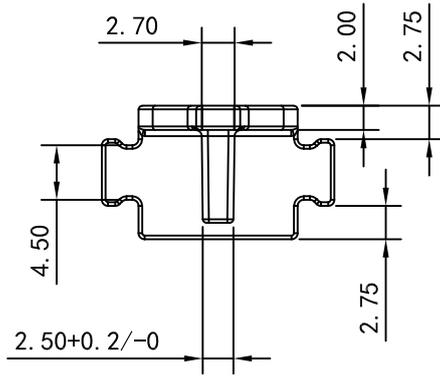

**備註 (NOTE):**

1. 材質 (Material): T375HF
2. 強度要求 (Strength requirement): 1.5kg MIN
3. 耐壓要求 (HI-POT requirements): 4KV/1.5mA/1Min
4. 焊錫溫度 (Soldering temperature): 450° ±10° 3SEC
5. 拉力 (Pull): 焊後拉力 (After welding tension) 1.2kg MIN
6. 模具狀況 (The mould status): 樣品模

客户确认  
簽回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	UC-14 BASE (4P)	MATERIAL	T375HF	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-B135	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 <b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05		 UL REC. : 94V0			
		PIN TENSION LOAD kg MIN				TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: APR 25 2025	