

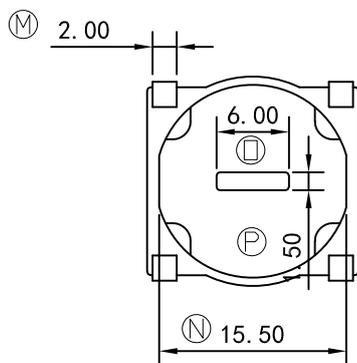
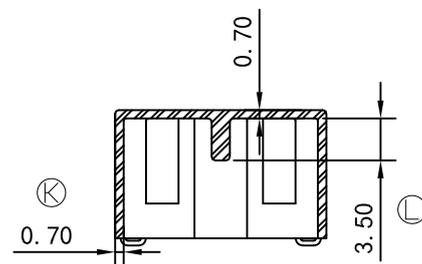


PIN平貼度0.15mm MAX

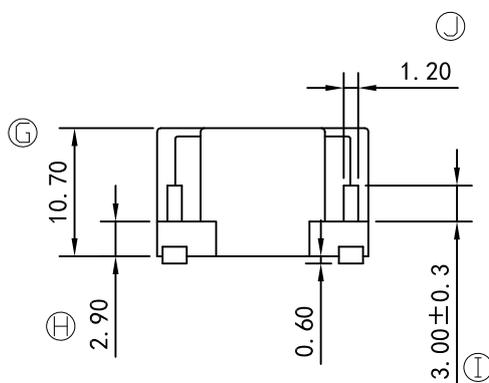

備註說明:

1. 材質: LCP-E4008
2. 強度要求: 1.50kg MIN
3. 耐壓4.0KV/1.5MA 1分鐘
4. 焊錫溫度380° ±10° 3SEC
5. PIN拉力: 焊後1.50kg MIN
6. 模具狀況: 樣品模

客户确认
簽回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|-----------------|------|-----|-----------------|------|
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| NAME | T12. 7X7. 92X6. 35BASE (4P) | MATERIAL | LCP-E4008 | SCALE | 1:1 | ANGLE | ±1° |
|--|-----------------------------|---|-----------|--------------------|-----|---------------|-----------------------|
| DRAWING NO. | HX-B145 | PIN MATERIAL | C5191磷青銅 | UNIT | m/m | REV. | 00 |
| <p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com</p> | | TOLERANCE OF PIN DIA ±0.05 | | | | UL REC. :94V0 | |
| | | TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3 | | DRAWN & DRAFTED BY | | LIN PENG FEI | CHECKED & APPROVED BY |
| | | | | DATE: | | JUL 29 2025 | |