
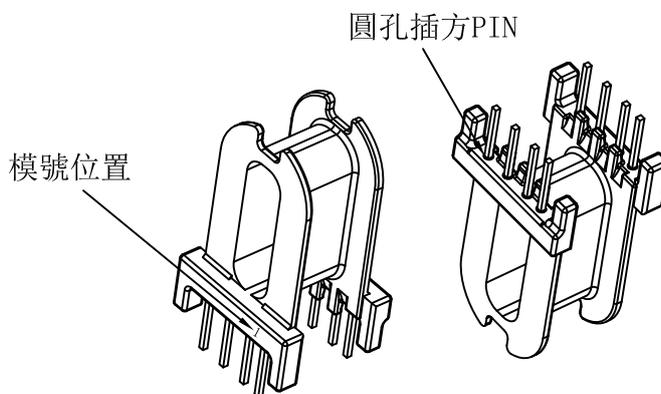
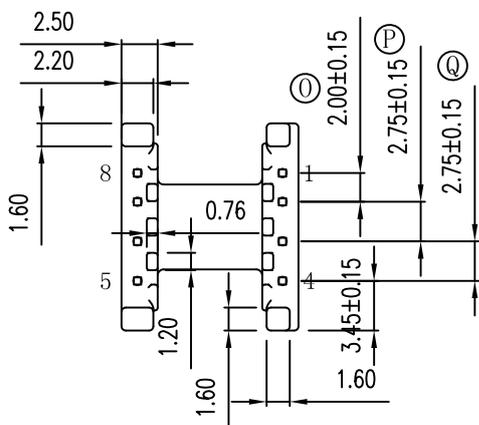
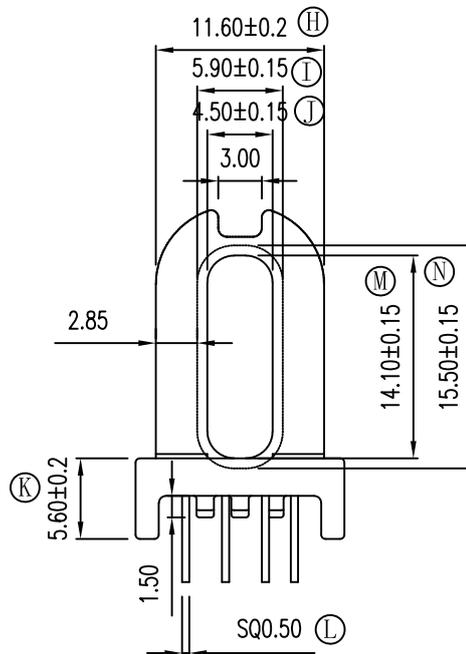


**備註說明:**

1. 材質: PM-9630
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1mA/3SEC
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫後拉力: 1.50kg MIN
6. 模具狀況: 量產模

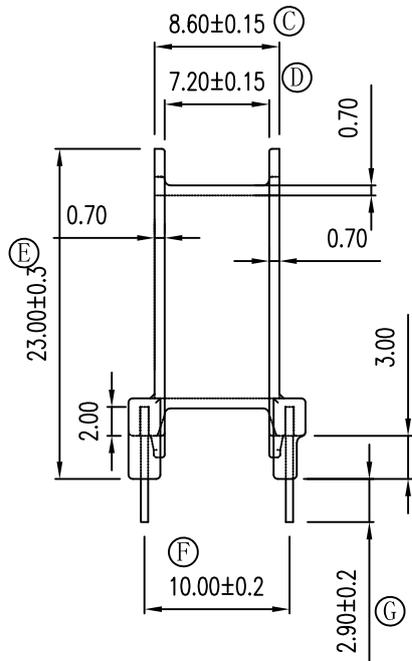

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
12.20	14.40	8.60	7.20	23.00	10.00	PL	11.60	5.90	4.50	5.60	0.50	14.10	15.50	2.00	2.75	2.75
±0.2	±0.2	±0.15	±0.15	±0.3	±0.2	±0.2	±0.2	±0.15	±0.15	±0.2	±0.05	±0.15	±0.15	±0.15	±0.15	±0.15

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	ATP-15 (8P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-1516	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00



**东莞市华欣塑胶制品有限公司**  
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.  
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111  
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA	±0.05	
PIN TENSION LOAD	kg MIN	UL REC. :94V0
TOLERANCE:	0<L≤4: ±0.1    4<L≤16: ±0.2    16<L≤63: ±0.3	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY
DATE:	MAY 19 2016	