

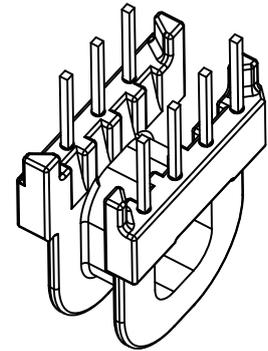
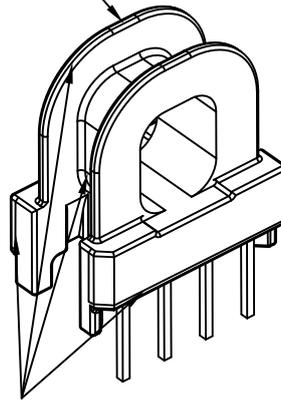
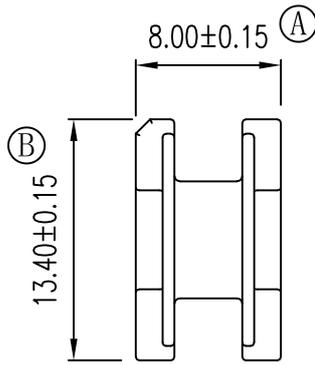
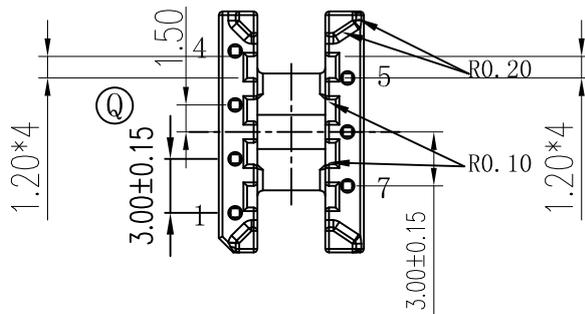


进胶口位置  
宽度4.00mm

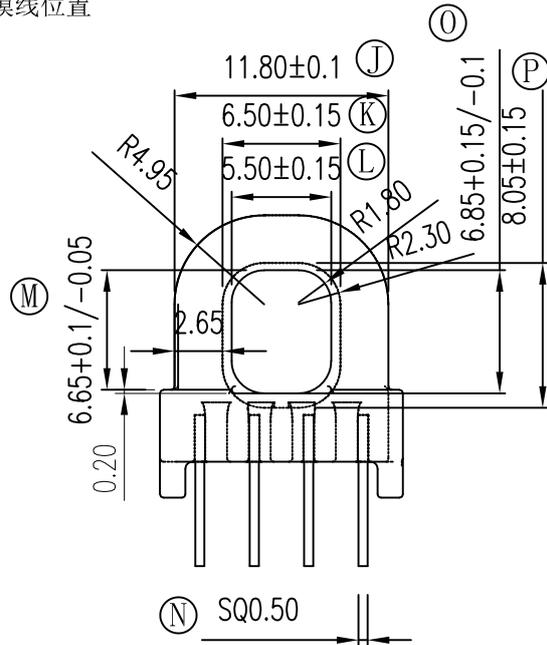

红色线条是合模线位置

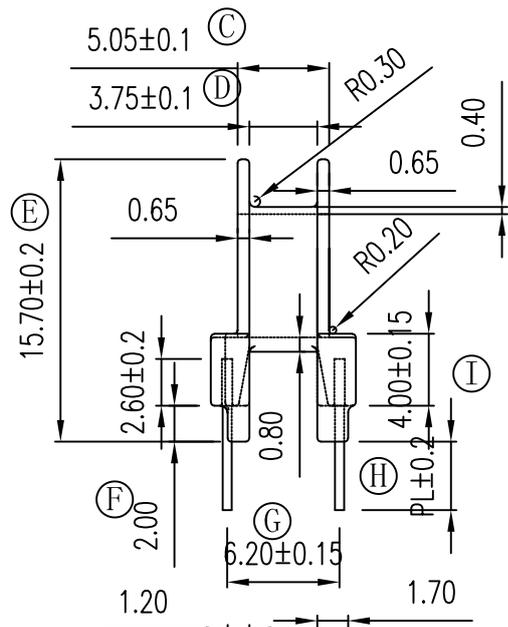

備註說明:

1. 材質: PM-9630
2. 強度要求: 1.50kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 焊錫後拉力: 1.50kg MIN
6. 模具狀況: 量產模

A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q
8.00	13.40	5.05	3.75	15.70	2.00	6.20		4.00	11.80	6.50	5.50	6.65	0.50	6.85	8.05	3.00
±0.15	±0.15	±0.1	±0.1	±0.2	±0.1	±0.15		±0.15	±0.1	±0.15	±0.15	+0.1 -0.05	±0.05	+0.15 -0.1	±0.15	±0.15

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	ATP-15 (7P)	MATERIAL	PM-9630	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX-1518	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		PIN TENSION LOAD kg MIN		TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: FEB 09 2018	