


**NOTE:**

1. 材质：PM-9820 (UL94V-0, UL No.E41429)
2. 颜色：黑色
3. 铁芯型号：EE16
4. PIN材质：3/4H CP WIRE, SQ0.64±0.02mm
5. 所有未标注圆角为0.2R MAX
6. 毛边最大为0.05mm
7. \*\* 为主要尺寸, \*\* 为次要尺寸,其他未标示尺寸为参考尺寸, \*\* 主要尺寸,IQC入料时需有检测记录
8. 此BOBBIN最小壁厚为: 0.64mm MIN
9. 尺寸公差:
 

0<L≤1	±0.06
1<L≤4	±0.1
4<L≤16	±0.15
16<L≤63	±0.2
10. 料號10E160000D, PIN腳6, 7, 8 CUT L1=3.40±0.2, L2=2.50±0.2,

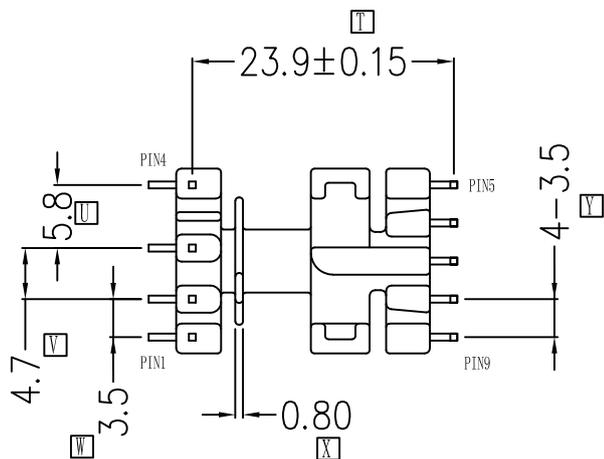

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-16 (9P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 1605	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00



**东莞市华欣塑胶制品有限公司**  
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD.  
TEL:0769-86388088 86388188 86388288 FAX:0769-86388111  
http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com

TOLERANCE OF PIN DIA ±0.05  
PIN TENSION LOAD 1.0 kg MIN  
UL REC. :94V0

DRAWN & DRAFTED BY LIN HUA JING  
CHECKED & APPROVED BY  
DATE: DEC 01 2012