
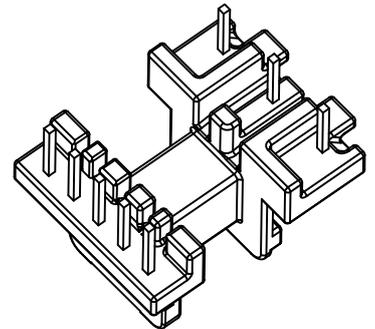
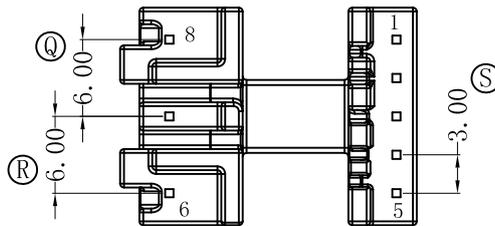
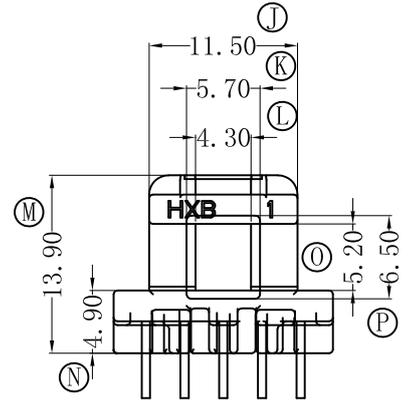
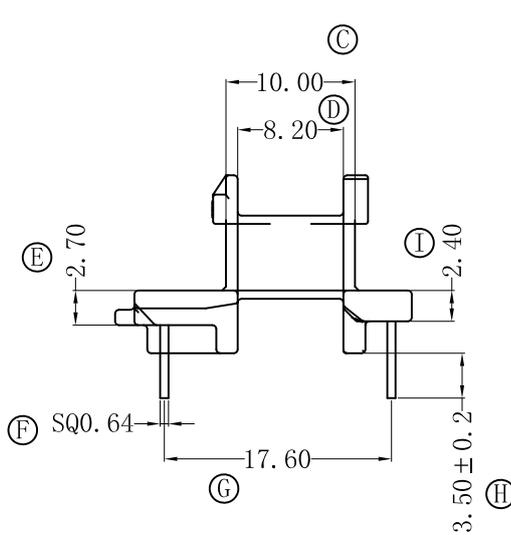

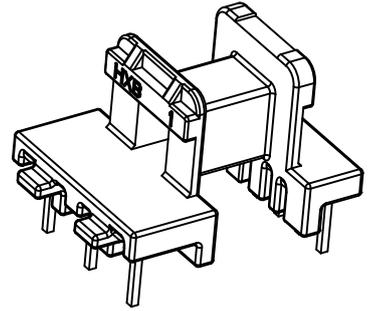


# HX-1650

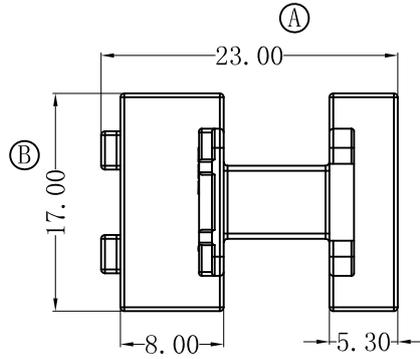

**NOTE:**

1. 材质: PM9823 (UL94V-0, UL No. E41429)
  2. 颜色: 黑色
  3. 铁芯型号: EE1615
  4. PIN材质: 3/4H CP WIRE, SQ0.64 ± 0.05mm
  5. 需符合超越《环境关联物质管理规范》
  6. 毛边最大为0.05mm
  7. 尺寸公差带
    - 0<L4 ±0.06
    - 1<L4 ±0.10
    - 4<L16 ±0.15
    - 16<L63 ±0.20
- ANGULAR DIMS ± 1/2 DEG

客户确认		RoHS HF
签回		

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-1615 (8P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	±1°
DRAWING NO.	HX 1650	PIN MATERIAL	CP WIRE	UNIT	mm	REV.	00
 <b>东莞市华欣塑胶制品有限公司</b> DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05		 UL REC.: 94V0			
		PIN TENSION LOAD 1.0 kg MIN					
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	APR 10 2025		