

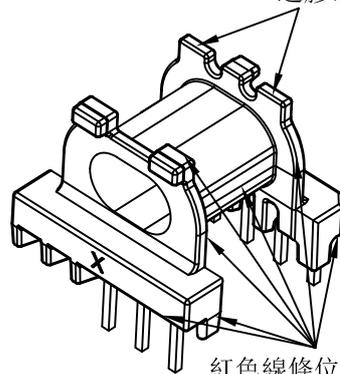
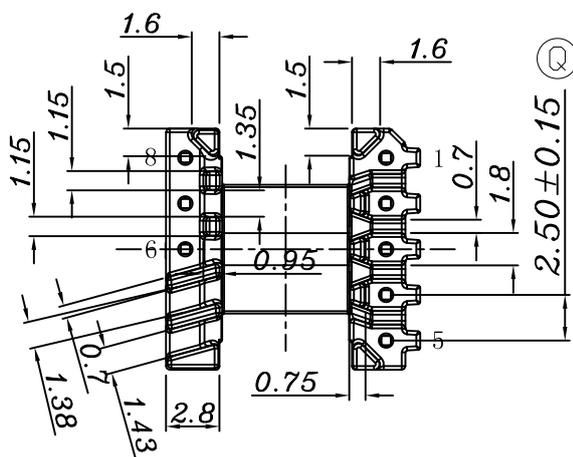
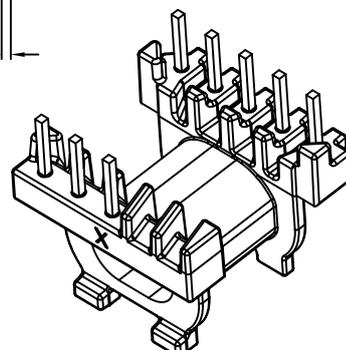
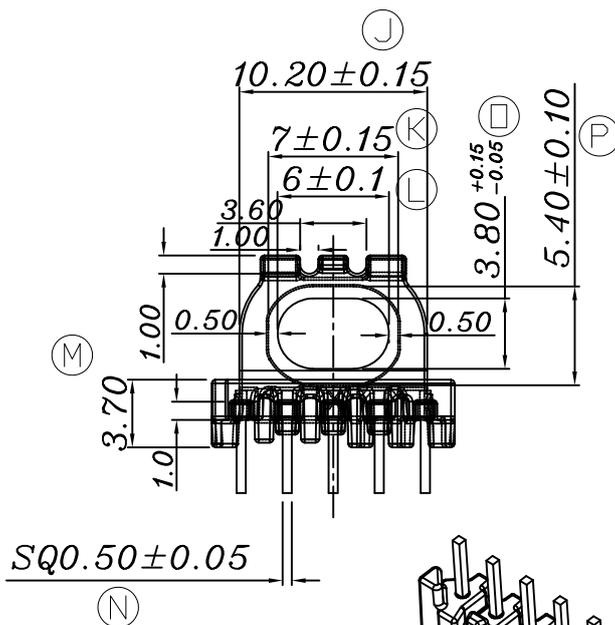


進膠口位置

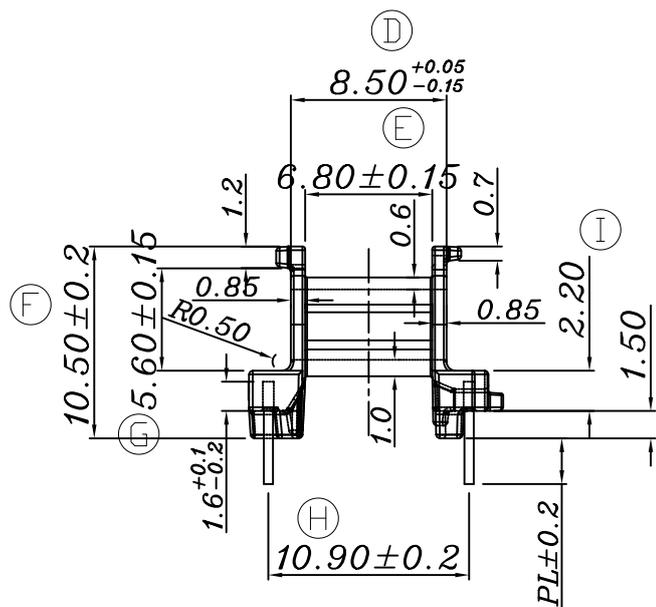

紅色線條位置是合模線

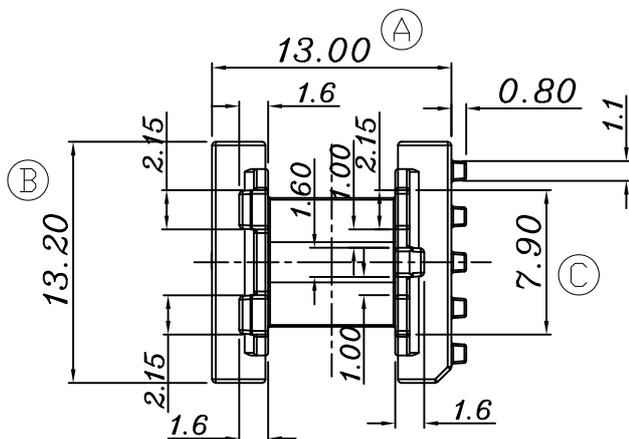

備註說明:

1. 材質: PM-9823
2. 拉力: 焊前是1.0kg MIN, 焊後是1.5kg MIN
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ± 10° 3SEC
5. 強度要求: 1.50kg MIN
6. 模具狀況: 量產模

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EPC13-13C (5+3P)	MATERIAL	PM-9823	SCALE	1:1	ANGLE	± 1°
DRAWING NO.	HX 1342	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		PIN TENSION LOAD 1.5 kg MIN		TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		DATE: JUN 26 2021	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY			