



進膠口位置
寬是4.00mm

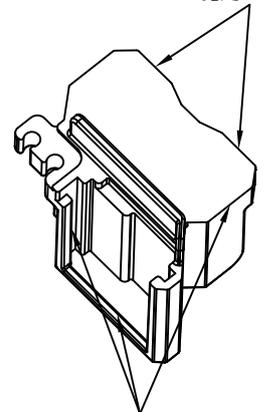

紅色線條是合模線位置

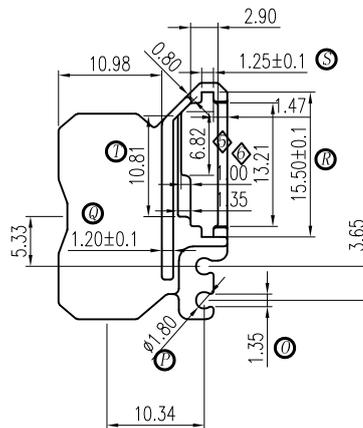


備註說明:

1. PART NO. : HX-0702B 樣品模
2. MATERIAL: PM-9823 MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: RM-7.5
5. MATERIAL OF PIN :
6. 強度要求: 1.50kg MIN
7. 耐壓要求: 4KV/1.5mA/1分鐘
8. 焊錫溫度: 450° ±10° 3SEC
9. 拉力:
10. HX-0702A與HX-0702B匹配OK

客户确认
签回

RoHS
HF

| REV. | REVISION RECORD | DATE | REV | REVISION RECORD | DATE |
|------|-----------------|------|-----|-----------------|------|
| 01 | | | 03 | | |
| 02 | | | 04 | | |

| NAME | RM-7.5 COVER | MATERIAL | PM-9823 | SCALE | 1:1 | ANGLE | ±1° |
|---|---|-----------------------|---------|-------|---|-------|-----|
| DRAWING NO. | HX-0702B | PIN MATERIAL | | UNIT | m/m | REV. | 04 |
|  <p>东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com</p> | TOLERANCE OF PIN DIA ±0.05 | | | |  | | |
| | PIN TENSION LOAD kg MIN | | | | UL REC. :94V0 | | |
| | TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3 | | | | | | |
| DRAWN & DRAFTED BY | LIN HUA JING | CHECKED & APPROVED BY | | DATE: | NOV 21 2017 | | |