


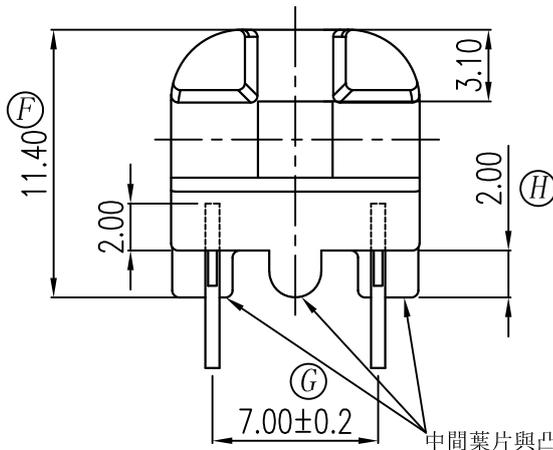
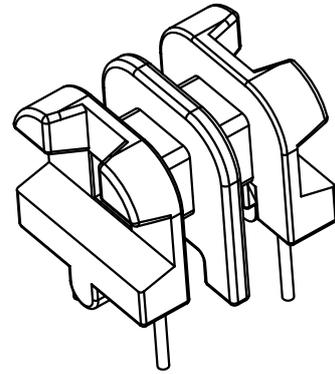


SECTION. A-A

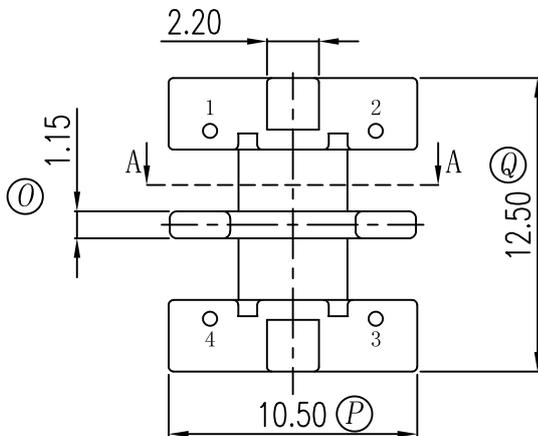


中間葉片與凸點須是平貼

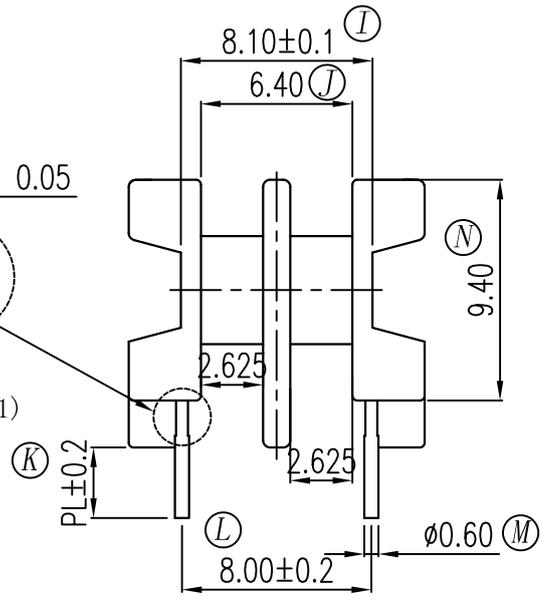

備註說明:

1. PART NO. : HX-0907 正式模
2. MATERIAL: T375HF MUST MEET UL94V-0
3. COLOR: BLACK
4. CORE TYPE: UU-9.8
5. MATERIAL OF PIN : 3/4H CP WIRE, 圓0.60±0.05
6. 強度要求: 1.50kg MIN, 中間葉片是1.0kg MIN
7. 耐壓要求: 4KV/1mA/3SEC
8. 焊錫溫度: 450° ±10° 3SEC
9. 拉力: 焊前拉力1.0kg MIN; 焊後拉力 1.2kg MIN

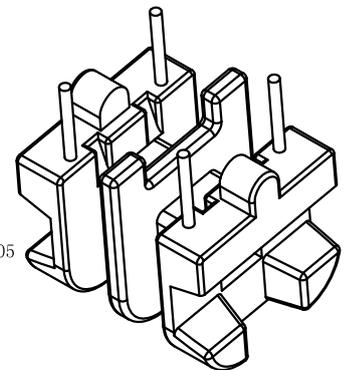

客户确认  
签回

RoHS  
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	UU-9.8(4P)	MATERIAL	T375HF	SCALE	3:1	ANGLE	±1°
DRAWING NO.	HX 0907	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD kg MIN TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3				UL REC. :94V0	
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY	DATE:	DEC 15 2007	