
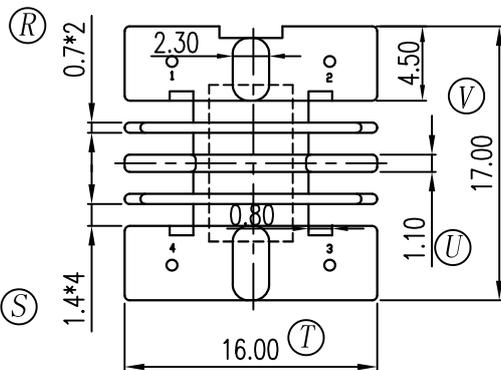
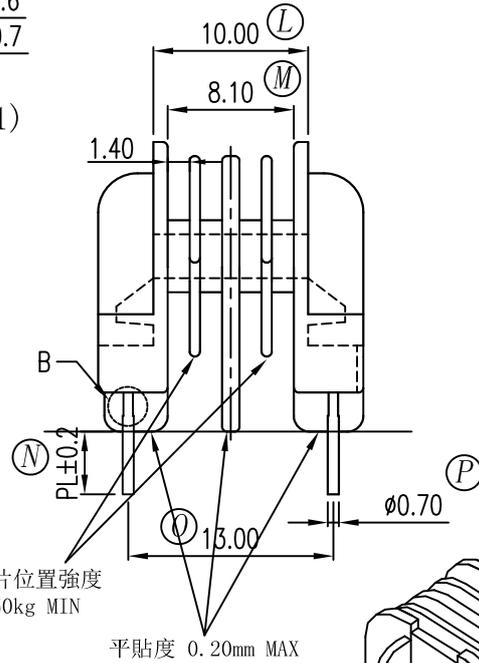



PIN咬花外露
DETAIL B (3:1)

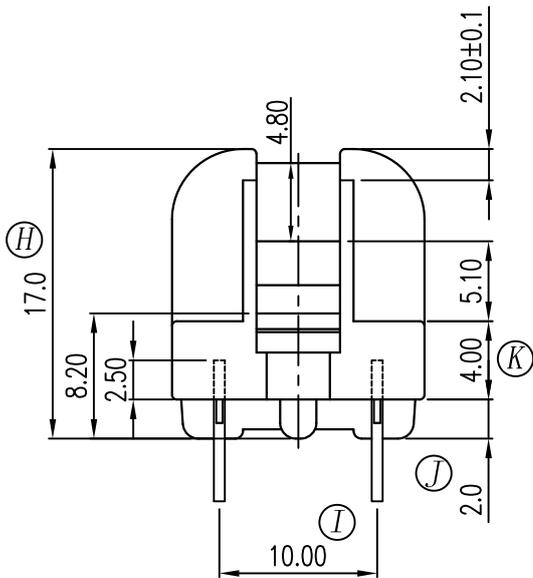

備註說明:

1. 材質: PM-9823
2. 強度要求: 1.80kg MIN,
3. 耐壓要求: 4KV/1.5mA/1分鐘
4. 焊錫溫度: 450° ±10° 3SEC
5. 拉力: 焊後拉力 1.5kg MIN
6. 模具狀況: 正式模

進膠口位置
寬度4.00mm

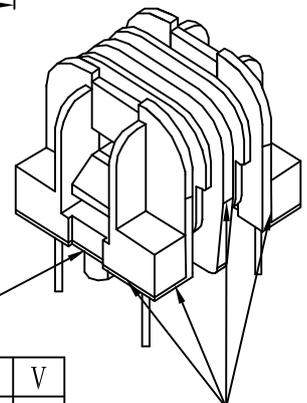

U	V
1.10	17.00
±0.1	±0.3

客户确认
签回



A	B	C	D	E	F	G	H	I	J	K	L	M	N	O	P	Q	R	S	T
15.60	7.30	5.50	2.80	4.60	14.00	15.90	17.00	10.00	2.00	4.00	10.00	8.10	PL	13.00	0.70		0.70	1.40	16.00
±0.2	±0.2	±0.1	±0.1	±0.2	±0.2	±0.2	±0.3	±0.2	±0.1	±0.1	±0.2	±0.2	±0.2	±0.2	±0.05		±0.1	±0.1	±0.2

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. PIN根部增加咬花外露	2013/12/23	03		
02			04		

NAME	UU-10.5(4P)	MATERIAL	PM-9823	SCALE	2:1	ANGLE	±1°
DRAWING NO.	HX-1006	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01
		东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.2 kg MIN TOLERANCE: 0<L≤4: ±0.1 4<L≤16: ±0.2 16<L≤63: ±0.3		UL REC.: 94V0	
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY		DATE:	AUG 24 2004		