

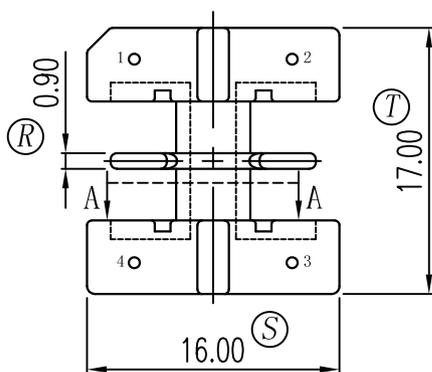
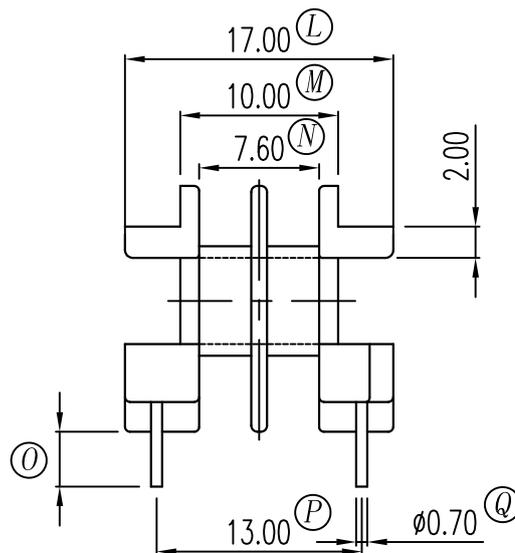
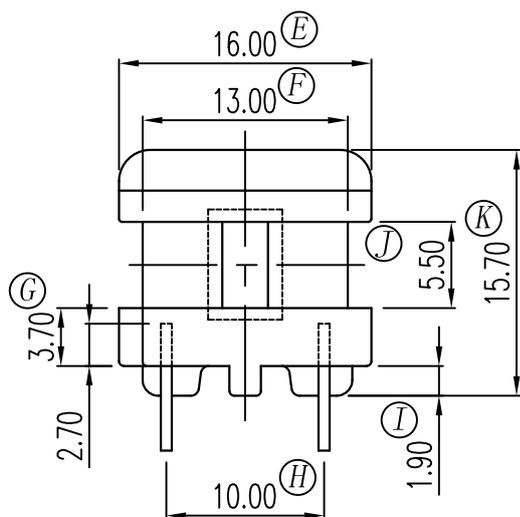


SECTION A-A



客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01	1. TOP部叶片加厚由0.80改为2.00 (mm)	2009/10/08	03		
02			04		

NAME	UU-10.5(4P)	MATERIAL	T375HF	SCALE	2:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX 1008	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	01



东莞市华欣塑胶制品有限公司
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD.
TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111
http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com

TOLERANCE OF PIN DIA ± 0.05		
PIN TENSION LOAD 1.2 kg MIN		UL REC. :94V0
TOLERANCE: $0 < L < 4$: ± 0.1 $4 < L < 16$: ± 0.2 $16 < L < 63$: ± 0.3		
DRAWN & DRAFTED BY	LIN HUA JING	CHECKED & APPROVED BY
DATE:		FEB 17 2006