
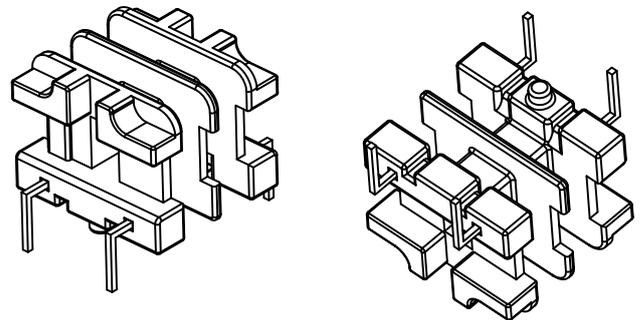
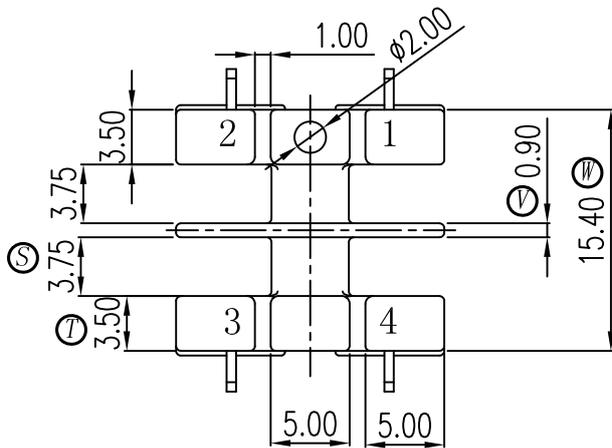
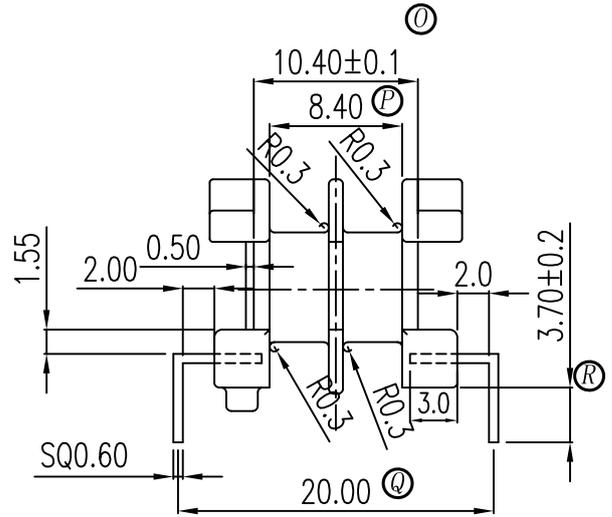
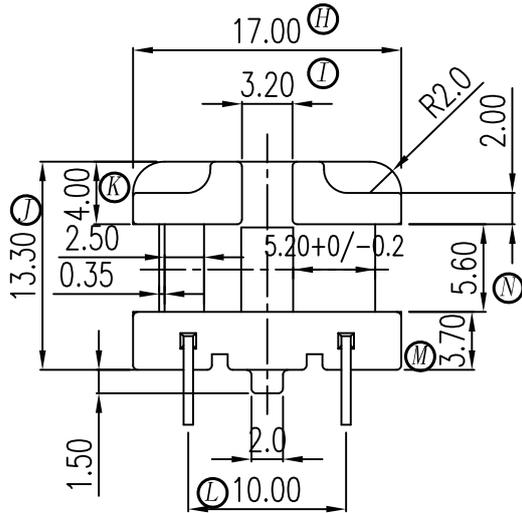

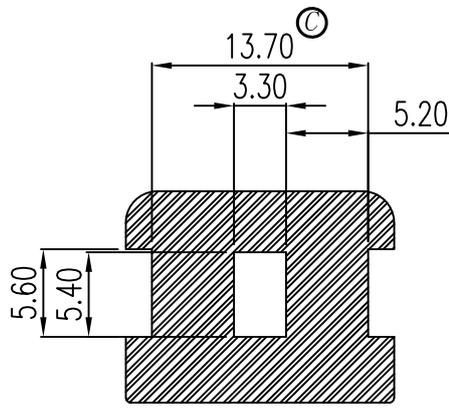


HX-1028

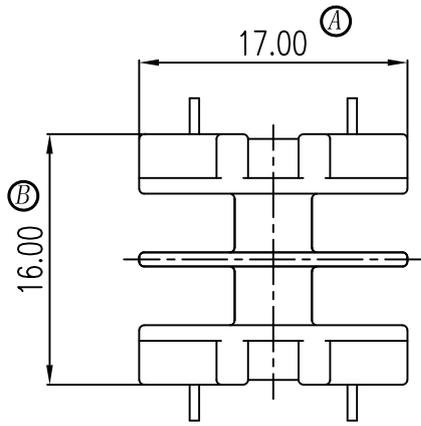

備註說明:

1. 模具狀況: 正式模
2. 強度要求: 中間葉片1.0kg MIN, 其他部位1.5kg MIN.
3. 耐壓要求: 4KV/1.5mA/1分鐘

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	UU-1116 (4P)	MATERIAL	PF-2736	SCALE	2:1	ANGLE	±1°
DRAWING NO.	HX-1028	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
 东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO., LTD. TEL: 0769-86388088 86388188 86388288 FAX: 0769-86388111 http://www.hxbobbin.com E-Mail: hxbobbin@vip.163.com		TOLERANCE OF PIN DIA ±0.05 PIN TENSION LOAD 1.0 kg MIN		 UL REC. :94V0 TOLERANCE: 0<L<4: ±0.1 4<L<16: ±0.2 16<L<63: ±0.3			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		DATE: MAR 13 2013	