

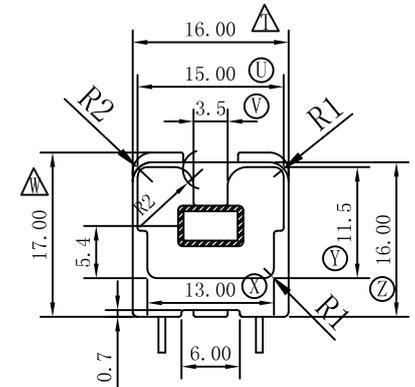
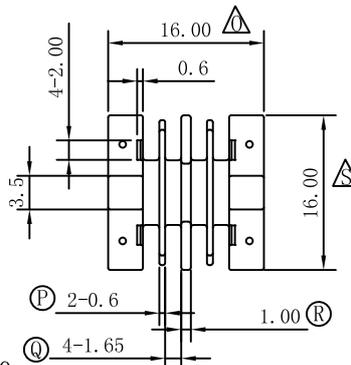
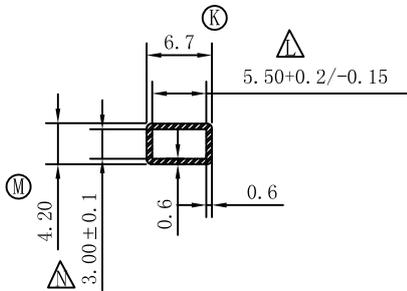
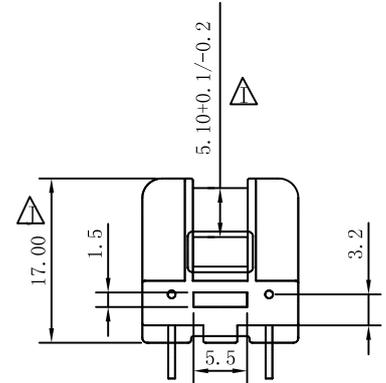
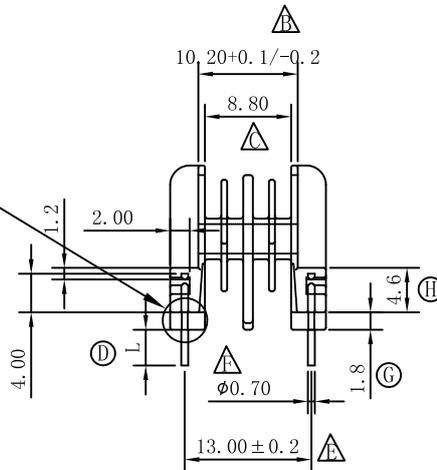


PIN咬花外露
DETAIL B (3:1)



備註說明:

- PART NO. : HX-1037 量產模
- MATERIAL: PET-FR530 MUST MEET UL94V-0
- COLOR: NATURAL
- CORE TYPE: UU-1112
- MATERIAL OF PIN : 3/4H CP WIRE, $\phi 0.70 \pm 0.05$
- DIMENSION MARK : \triangle MAIN DIM., \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM.
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。
- 強度要求: 2.00kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: $450^\circ \pm 10^\circ$ 3SEC
- 拉力: 焊後拉力 1.5kg MIN

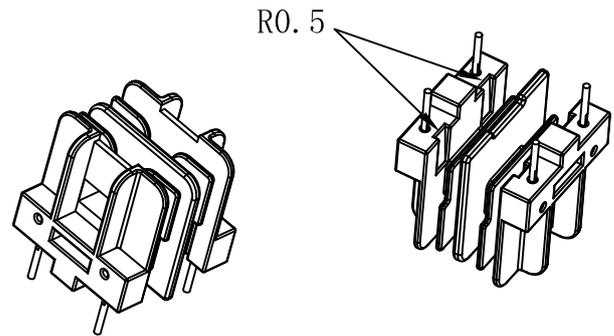

RoHS

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
A			C		
B			D		

NAME	UU-1112 (4P)	MATERIAL	PET-FR530	SCALE	1:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX-1037	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
东莞市华欣塑胶制品有限公司 DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE OF PIN PITCH ± 0.20				UL REC. :94V0	
		PIN TENSION LOAD 1.5 kg MIN		TOLERANCE: $0 < L < 4: \pm 0.1$ $4 < L < 16: \pm 0.2$ $16 < L < 63: \pm 0.3$			
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY		LIN GUO PING	
				DATE:		MAR 06 2014	