
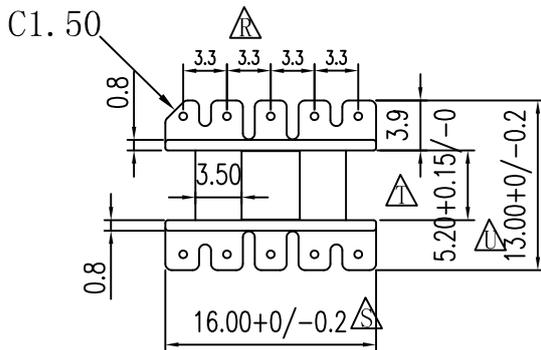


PIN咬花外露
DETAIL A(3:1)

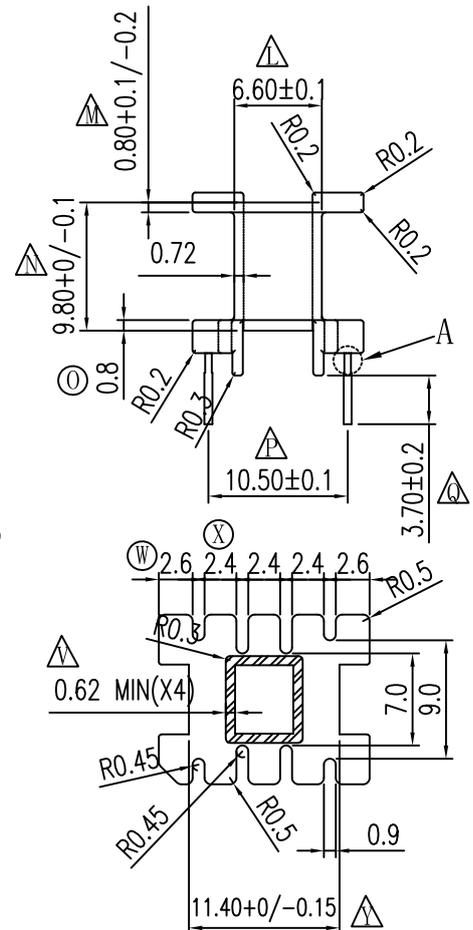

備註說明:

- PART NO. : HX-1635 正式模
- MATERIAL: PM-9820 MUST MEET UL94V-0
- COLOR: BLACK
- CORE TYPE: EE-16
- MATERIAL OF PIN : 3/4H CP WIRE, $\square 0.60 \pm 0.05$
- DIMENSION MARK : \triangle MAIN DIM. , \otimes SECOND DIM, OTHERWIRE ARE REFERENTIAL DIM. .
标示的 \triangle 为重要尺寸, 标示的 \otimes 为次要尺寸。
- 強度要求: 1.50kg MIN
- 耐壓要求: 4KV/1.5mA/1分鐘
- 焊錫溫度: $450^\circ \pm 10^\circ$ 3SEC
- 拉力: 焊後拉力 1.5kg MIN

客户确认
签回

RoHS
HF

REV.	REVISION RECORD	DATE	REV	REVISION RECORD	DATE
01			03		
02			04		

NAME	EE-16 (10P)	MATERIAL	PM-9820	SCALE	1:1	ANGLE	$\pm 1^\circ$
DRAWING NO.	HX-1635	PIN MATERIAL	CP WIRE	UNIT	m/m	REV.	00
		TOLERANCE OF PIN DIA ± 0.05				PIN TENSION LOAD 1.5 kg MIN	
DONGGUAN HUAXIN PLASTIC MANUFACTURING PRODUCTS CO.,LTD. TEL:0769-86388088 86388188 86388288 FAX:0769-86388111 http://www.hxbobbin.com E-Mail:hxbobbin@vip.163.com		TOLERANCE: $0 < L < 4: \pm 0.1$ $4 < L < 16: \pm 0.2$ $16 < L < 63: \pm 0.3$		UL REC. :94V0		DATE: APR 02 2014	
DRAWN & DRAFTED BY		LIN HUA JING		CHECKED & APPROVED BY			